

DOMINI (-)

Durable and Reliable Bollard Family



IK05 IP65




PHASED-
OUT

Advanced optics and strong characteristics make the DOMINI family stand out to illuminate pathways, landscaped areas, and other public spaces.



- Equipped with HEPER's AreaFlex (AFX) or efficient LED technology with high transmittance lenses
- Flexible light distribution options from Type I through Type V (AFX)
- Simple design that blends in with different types of architecture
- Single or double head layout options

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LB6047.551-EN	DOMINI 12 LED	[T2] 140x50°,	1576 - 1626 lm	15 W	3000 K CRI 80, 4000 K CRI 70	On/Off	5.8 kg
LB6047.552-EN	DOMINI 24 LED	[T2] 140x100°,	3229 - 3472 lm	28 W	3000 K CRI 80, 4000 K CRI 70	On/Off	7.63 kg

LB6047.871

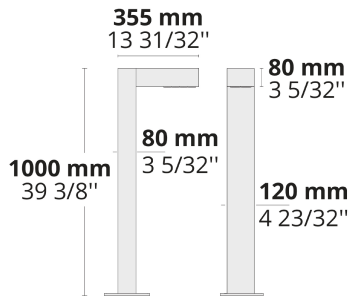

LB6047.872

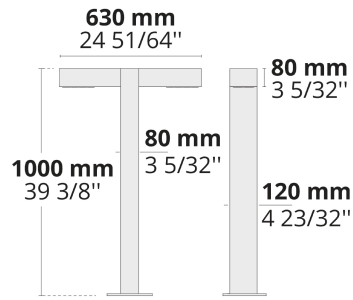**[T2]**

Type II,
Asymmetric,
Side throw

Extras

Consult the factory

Luminaire body options

120-277V
50/60Hz


UNI

120-277V 50/60Hz

DPC**DPC**Double powder
coating

Accessories (To be ordered separately)

Anchorage

**90AJ001**

90AJ001

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey

+90 312 267 54 30

info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675

Hemer, Germany


+49 237 2901 2975

infoEU@hepergroup.com


We reserve the right to change specifications
without prior written notice. Edition: 03.05.2024.
For current version visit heperlighting.com. All
flux (±%7 tolerance) and power values (±%10
tolerance) are derived following appropriate IES,
CIE, and applicable standards.




[HM1]
Black




[HM2]
Dark grey



[HM3]
Anthracite
grey



[HM4]
Light grey



[HM5]
White



[HM6]
Bronze



[CC]
Custom
colour
(Please
specify RAL
code)