DOMINI

Durable and Reliable Bollard Family



Œ





Advanced optics and strong characteristics make the DOMINI family stand out to illuminate pathways, landscaped areas, and other public spaces.

- Equipped with HEPER's AreaFlex (AFX) module
- Flexible light distribution options from Type I through Type V (AFX)
- Approved by the DarkSky International (AFX).
- Simple design that blends in with different types of architecture
- Single or double head layout options


Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LB6047.871-EN	DOMINI AFX MIDI 1 Module	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°,	944 - 2272 lm	10 - 20 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	5.7 kg
LB6047.872-EN	DOMINI AFX MIDI 1 Module Duo	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°,	1887 - 4544 lm	20 - 37 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	7.43 kg

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 25.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

1/2

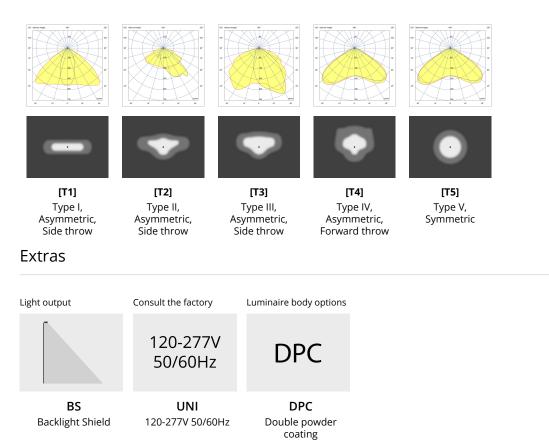

Accessories (To be ordered separately)



HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 25.04.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/2