

# SPARK B

Modernized, Flexible and Multi-functional Bollard Family



CE UK CA IK07 IP66



SPARK is a product range designed for illuminating both building facades and landscapes. With its wide range of accessories, SPARK offers exceptional flexibility and versatility, making it suitable for various applications across different fields.





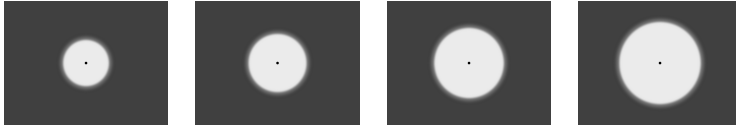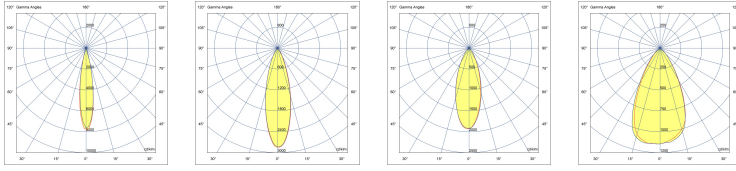

- Equipped with high efficacy COB LED with long time reliability
- 4 different light distribution options from very narrow to wide
- Available in 2700K and 3000K with a color rendering index value of 90
- Anodized aluminum body with knurled surface improves the thermal management
- Easy locking system for fine tuning and aiming

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LB8060.529-EN	SPARK B	[VN] 18°, [N] 24°, [MN] 36°, [M] 60°	590 - 727 lm	10 W	2700 K CRI 90, 3000 K CRI 80, 3000 K CRI 90		3.2 kg(0.9m) ,2.2 kg(0.6m)
LB8061.529-EN	SPARK B Duo	[VN] 18°, [N] 24°, [MN] 36°, [M] 60°	1180 - 1570 lm	22 W	2700 K CRI 90, 3000 K CRI 80, 3000 K CRI 90		3.5kg(0.9m) , 2.5kg(0.6m)



**[VN]** Very narrow      **[N]** Narrow      **[MN]** Medium narrow      **[M]** Medium

## Extras



Light output	Light output	Light output	Light output	Light output	Light output
					
<b>BCF</b> Blue Colour Filter	<b>GCF</b> Green Colour Filter	<b>HNY</b> Honeycomb	<b>OCF</b> Orange Colour Filter	<b>RCF</b> Red Colour Filter	<b>YCF</b> Yellow Colour Filter

### Luminaire body options



**DPC**  
Double powder coating

## Accessories (To be ordered separately)

Mounting accessories	Mounting accessories
	
<b>DALI &amp; On/Off driver within an IP67 box for SPARK</b> 007502121	<b>DALI &amp; On/Off driver within an IP67 box for SPARK Duo</b> 007502122

