

PINA F



Simple and Functional Floodlight Family



Small form factor and flexible optics make PINA F stand out for lighting applications in landscaped areas.

- Equipped with GU10 LED light source
- Offering up to 4 different beam angles from very narrow to medium
- +45°/-45° vertically adjustable with aim locking set screw allowing fine-tuning
- Easy installation and maintenance
- Surface mountable via a stationary base or spike (optional)

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LF8033.003-US	PINA Flood	[VN] 10°, [N] 25°, [MN] 36°, [M] 60°	368 - 410 lm	7.5 W	2700 K CRI 90, 3000 K CRI 90, 4000 K CRI 90	On/Off, Phase dimming	0.9 lbs

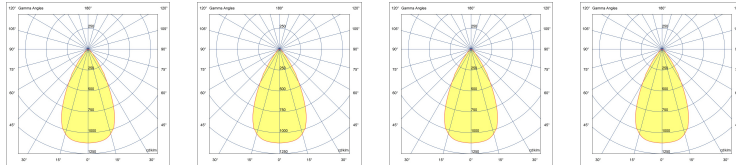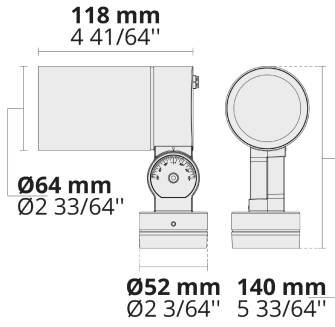

[VN]

Very narrow -
NEMA Type 1

[N]

Narrow - NEMA
Type 2

[MN]

Medium narrow -
NEMA Type 3

[M]

Medium - NEMA
Type 4


Accessories (To be ordered separately)

Mounting accessories



Spike

160405040



[HM1]

Black

[HM2]

Dark gray

[HM3]

Anthracite
gray

[HM4]

Light gray

[HM5]

White

[HM6]

Bronze

[CC]

Custom
color
(Please
specify RAL
code)