PINAF

Simple and Functional Floodlight Family







Small form factor and flexible optics make PINA F stand out for lighting applications in landscaped areas.

- Equipped with GU10 LED light source
- Offering up to 4 different beam angles from very narrow to medium
- +45°/-45° vertically adjustable with aim locking set screw allowing fine-tuning
- Easy installation and maintenance
- Surface mountable via a stationery base or spike (optional)

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LF8033.003-US	PINA Flood	[VN] 10°, [N] 25°, [MN] 36°, [M] 60°,	368 - 410 lm	7.5 W	2700 K CRI 90, 3000 K CRI 90, 4000 K CRI 90	On/Off, Phase dimming	0.9 lbs

LF8033.003



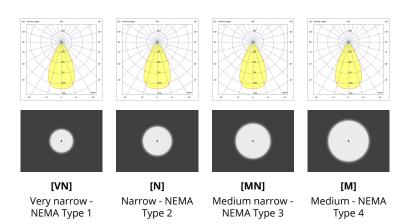

Accessories (To be ordered separately)

Mounting accessories



Spike 160405040



[HM1] Black



[HM2] Dark gray





[HM3] Anthracite gray



[HM4] Light gray



[HM5] White



[HM6] Bronze



[CC] Custom color (Please specify RAL code)