

PUNTO

Flexible and Reliable Floodlight Family




With its round form factor, advanced optics providing perfect beam control, and durable body PUNTO family stand out for highlighting architectural details in high-end projects.


- Equipped with HEPER's Hybrid (HYB) module [S] [N]
- 4 different light distribution options from very narrow to wide
- Well-defined beam angles with reflector and lens combined (HYB)
- +60°/-30° vertically adjustable with aim locking set screw allowing fine-tuning
- Different sizes and lumen packages in order to comply with any project needs

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LF8017.693-EN	PUNTO S	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	606 - 1019 lm	10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	1.52 kg
LF8030.693-EN	PUNTO S Ex	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	606 - 1019 lm	10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	1.57 kg
LF8018.694-EN	PUNTO	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	1767 - 2981 lm	26 - 27 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	4.14 kg
LF8019.698-EN	PUNTO L	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	4242 - 7060 lm	60 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	6.56 kg


LF8017.693

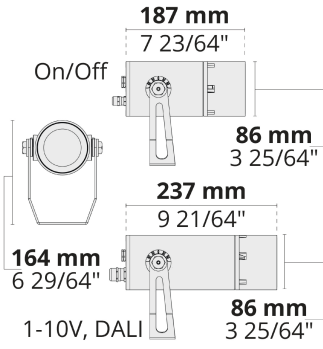



LF8018.694

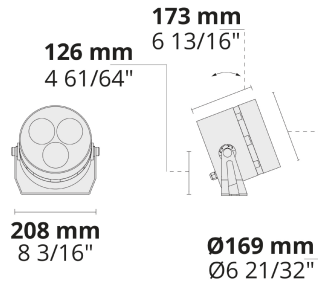

LF8019.698

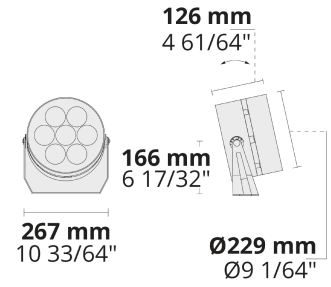

LF8030.693

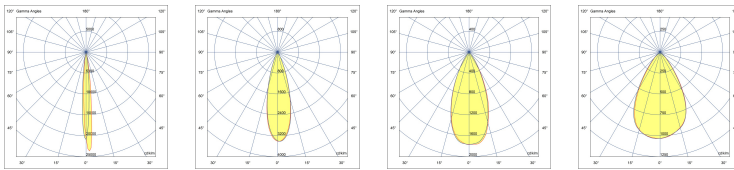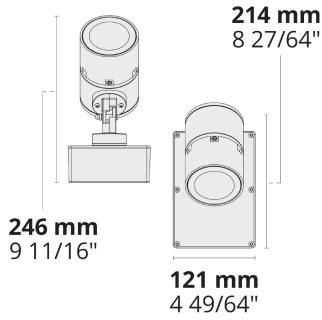

[S] Spot
[N] Narrow
[MN] Medium narrow
[M] Medium

Extras

Consult the factory

Luminaire body options

120-277V
50/60Hz

DPC

UNI

120-277V 50/60Hz

DPC

Double powder
coating

Accessories (To be ordered separately)

Mounting accessories

Optical accessories

Optical accessories

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com


We reserve the right to change specifications
without prior written notice. Edition: 23.04.2024.
For current version visit heperlighting.com. All
flux (±%7 tolerance) and power values (±%10
tolerance) are derived following appropriate IES,
CIE, and applicable standards.



Spike
160405040




Visor for PUNTO S
007502282



Snoot for PUNTO
007502216


Optical accessories




Snoot for PUNTO L
007502177




[HM1]
Black



[HM2]
Dark grey



[HM3]
Anthracite
grey



[HM4]
Light grey



[HM5]
White



[HM6]
Bronze



[CC]
Custom
colour
(Please
specify RAL
code)