


REGIO (-)

Flexible Floodlight Family with Extreme Power

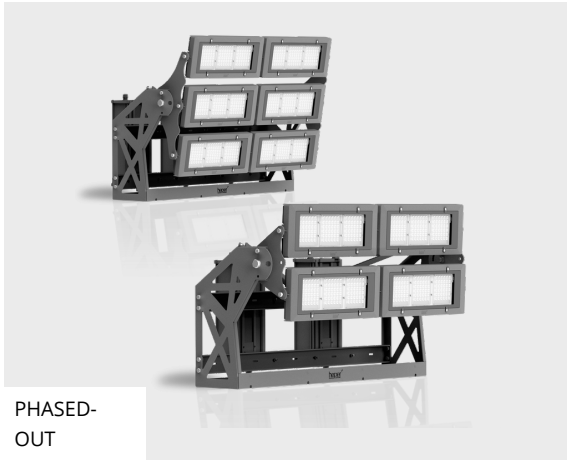


PHASED-
OUT

Multiple sizes, flexible optics and high-power light output options make the REGIO family stand out for the illumination tasks for public areas, sports arenas, and airport aprons.

- Glare management with special lens system
- 6 different beam angle options
- +45°/-45° vertically adjustable with aim locking set screw allowing fine-tuning
- Each part can be set to a different tilt angle separately
- Easy installation and maintenance with modular structure


Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LF8032.524-EN	REGIO 4 Module	[EL] 15x40°, [N] 22°, [MN] 30°, [W] 111°	93487 - 132044 lm	916 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, DALI	42.35 kg
LF8032.526-EN	REGIO 6 Module	[N] 22°, [MN] 30°, [W] 111°	140231 - 198066 lm	1375 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, DALI	58.18 kg
LF8032.534-EN	REGIO A 4 Module	[SLFB] 106x28°	48650 - 59247 lm	630 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	44.30 kg
LF8032.536-EN	REGIO A 6 Module	[SLFB] 106x28°	72975 - 88870 lm	945 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	58.91 kg

LF8032.524 / LF8032.534

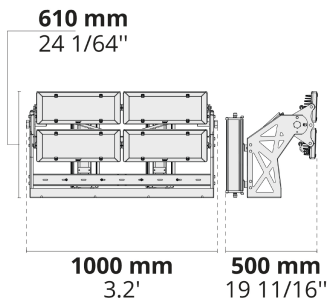





LF8035.522

LF8032.526 / LF8032.536

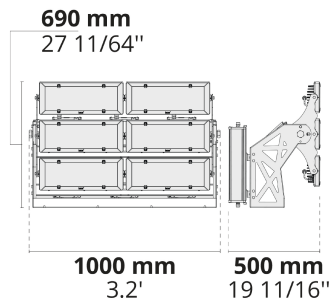

LF8035.523

LF8035.521

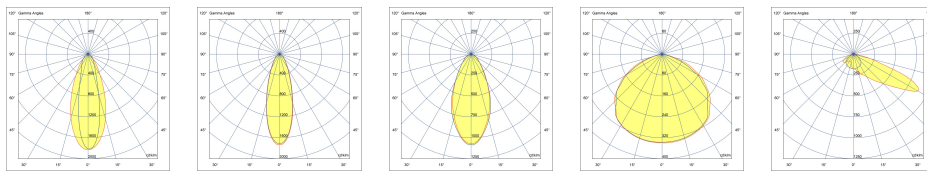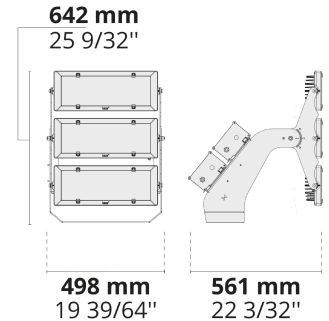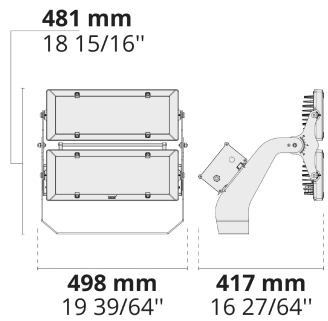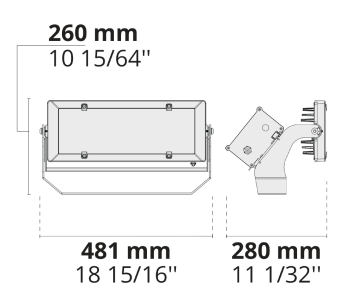

[EL]
Elliptical

[N]
Narrow

[MN]
Medium narrow

[W]
Wide

[SLFB]
Special linear,
Forward throw

Extras

Consult the factory

Luminaire body options

120-277V
50/60Hz

DPC

UNI

120-277V 50/60Hz


DPC

Double powder
coating


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications
without prior written notice. Edition: 21.06.2024.
For current version visit heperlighting.com. All
flux (±%7 tolerance) and power values (±%10
tolerance) are derived following appropriate IES,
CIE, and applicable standards.



[HM3]
Anthracite
grey



[HM4]
Light grey



[CC]
Custom
colour
(Please
specify RAL
code)