


# REGIO (-)

Flexible Floodlight Family with  
Extreme Power

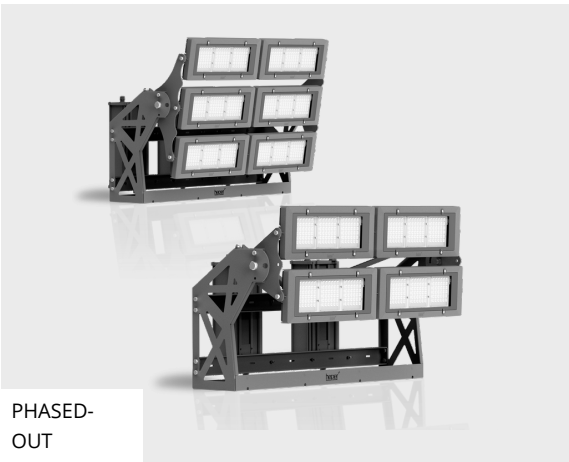


PHASED-  
OUT

Multiple sizes, flexible optics and high-power light output options make the REGIO family stand out for the illumination tasks for public areas, sports arenas, and airport aprons.


- Glare management with special lens system
- 6 different beam angle options
- +45°/-45° vertically adjustable with aim locking set screw allowing fine-tuning
- Each part can be set to a different tilt angle separately
- Easy installation and maintenance with modular structure

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LF8032.524-US	REGIO 4 Module		93487 - 132044 lm	916 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, 0-10V	93.17 lbs
LF8032.526-US	REGIO 6 Module		140231 - 198066 lm	1375 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, 0-10V	128 lbs
LF8032.534-US	REGIO A 4 Module	[SLFB] 106x28°,	48650 - 59247 lm	630 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	97.46 lbs
LF8032.536-US	REGIO A 6 Module		72975 - 88870 lm	945 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	129.60 lbs


LF8032.524 / LF8032.534

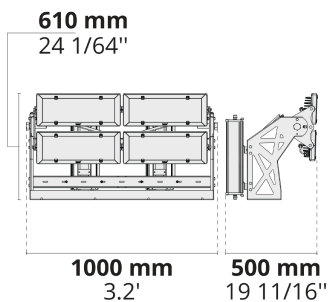


LF8035.522

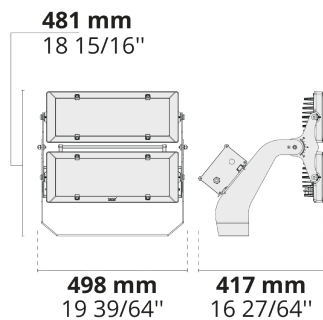



LF8032.526 / LF8032.536

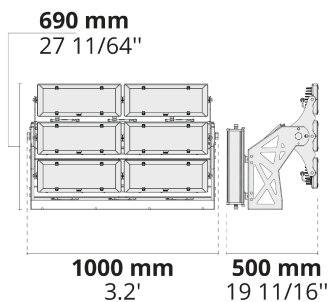

LF8035.523

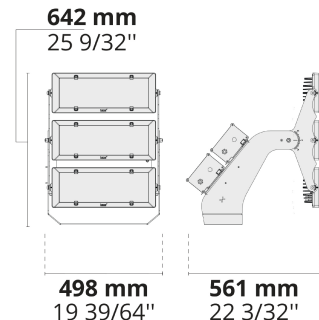

LF8035.521

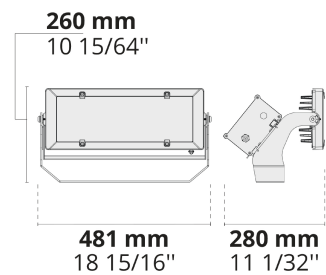

[SLFB]

Special linear,  
Forward throw

## Extras


Luminaire body options

DPC


DPC  
Double powder  
coating

HEPER USA LLC  
W227 N546 Westmound Drive Waukesha, 53186  
Wisconsin, United States  
+1 312 910 9740  
infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 30.04.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.



**[HM3]**  
Anthracite  
gray



**[HM4]**  
Light gray



**[CC]**  
Custom  
color  
(Please  
specify RAL  
code)