


REGIO

Flexible Floodlight Family with Extreme Power

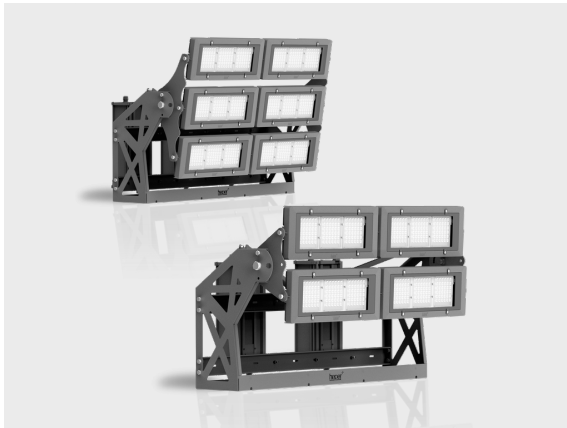


Multiple sizes, flexible optics and high-power light output options make the REGIO family stand out for the illumination tasks for public areas, sports arenas, and airport aprons.

- Glare management with special lens system
- 6 different beam angle options
- +45°/-45° vertically adjustable with aim locking set screw allowing fine-tuning
- Each part can be set to a different tilt angle separately
- Easy installation and maintenance with modular structure


Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LF8035.521-US	REGIO 1 Module		23372 - 33010 lm	229 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, 0-10V	24 lbs
LF8035.522-US	REGIO 2 Module		46744 - 66029 lm	459 - 500 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 70, 5700 K CRI 90	On/Off, 0-10V	42.1 lbs
LF8035.523-US	REGIO 3 Module		70115 - 99033 lm	687 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80, 5700 K CRI 90	On/Off, 0-10V	79 lbs

LF8032.524 / LF8032.534

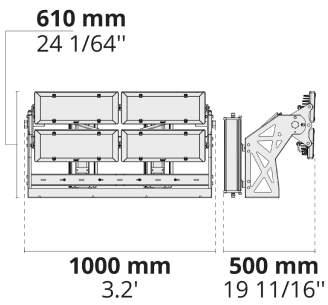




LF8035.522

LF8032.526 / LF8032.536

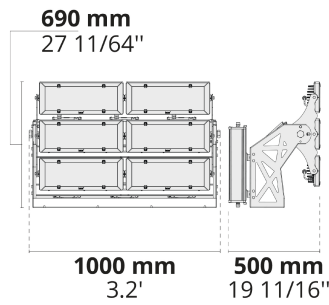

LF8035.523

LF8035.521

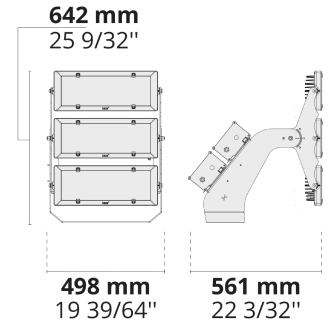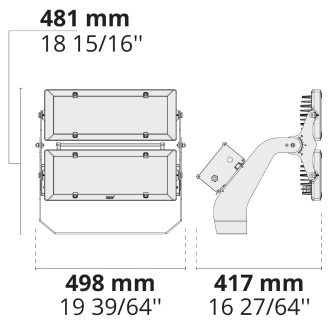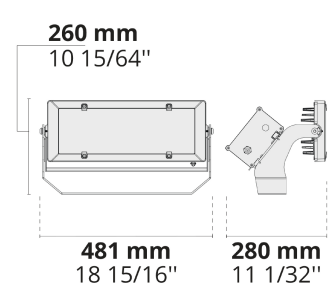


Extras

Luminaire body options


DPC

DPC

Double powder coating



[HM3]
Anthracite gray



[HM4]
Light gray



[CC]
Custom color
(Please specify RAL code)