REXA

IK08 IP66



REXA is an outdoor lighting solution designed for area and street lighting applications, distinguished by its fluid and distinctive form that brings a strong identity to urban environments. Inspired by organic lines, its unique housing design goes beyond functioning as a lighting fixture, contributing aesthetically to the architectural character of its surroundings. Combining high-efficiency LED technology, advanced optical engineering, and long-lasting performance, REXA achieves a balanced integration of aesthetic appeal and technical excellence. Equipped with the AreaFlex (AFX) optical system, it offers flexible light distribution options ranging from Type I to Type V, enabling seamless adaptation to a wide variety of application requirements. Compatible with smart lighting systems, REXA brings together energy efficiency, visual comfort, and design flexibility on a single platform for diverse outdoor applications. While its sculptural form draws attention during the day, its uniform and effective light distribution at night makes it a powerful lighting solution for contemporary urban projects.

Product code	Product name	Light distribution	Luminaire luminous flux	Rated input power	Colour temperature	Control	Weight
LL2047.873-EN	REXA AFX Midi 3 Module Duo	[T1] 119x46° [T2] 136x52° [T2-2] 143x58° [T3] 130x67° [T4] 120x67° [T5] 127°	8880 - 20394 lm	96 - 158 W	2700 K CRI 80 3000 K CRI 80 4000 K CRI 80	On/Off DALI	57 kg (6 m-4 m), 62 kg (6 m-6 m)
LL2047.874-EN	REXA AFX Midi 4 Module Duo	[T1] 119x46° [T2] 136x52° [T2-2] 143x58° [T3] 130x67° [T4] 120x67° [T5] 127°	13152 - 27192 lm	144 - 210 W	2700 K CRI 80 3000 K CRI 80 4000 K CRI 80	On/Off DALI	68 kg (8 m-6 m), 74 kg (8 m-8 m)

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 19.11.2026. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Extras

Consult the factory

120-277V
50/60Hz

UNI
120-277V 50/60Hz


Luminaire body options

MGF

MGF
Marine grade finish


Accessories (To be ordered separately)

Anchorages



90DJ008
90DJ008

Flange covers



C1G2E
C1G2E



[T1]
Type I, Asymmetric, Side throw



[T2]
Type II, Asymmetric, Side throw




[T2-2]
Type II, Asymmetric, Side throw



[T3]
Type III, Asymmetric, Side throw



[T4]
Type IV, Asymmetric, Forward throw



[T5]
Type V, Symmetric



[HM1]
Black



[CC]
Custom colour (Please specify RAL code)


[7035]
Light grey (RAL 7035)

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com


HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 19.11.2026. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

LL2047.873-EN

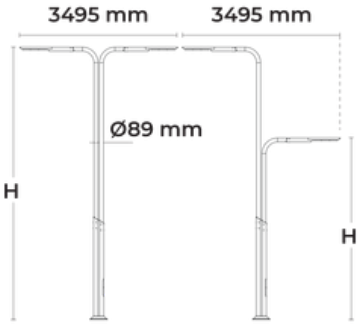

LL2047.874-EN



HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 19.11.2026. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.