

# TURA

Highly Flexible and Functional Pole-top Family





Precise light distribution and endless optical possibilities make TURA stand out for area and street lighting applications.

- Equipped with high-efficiency and long-lasting LED light source
- PMMA lenses with high optical adaptability
- Outstanding thermal management through the high-grade aluminum body
- Further flexibility with +15/-15 tilt angle
- Auto on-off switch during maintenance
- Tool-less access to housing

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LL2036.751-US	TURA 1x12 LED	[P4] 22x77°, [T1] 113x48°, [T2] 137x52°, [T2-2] 150x60°, [T2BL] 128x48°, [T3] 143x68°, [T3-2] 158x59°, [T3BL] 128x50°, [T4] 121x70°, [T4BL] 111x38°	2436 - 3437 lm	28 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.752-US	TURA 2x12 LED	[P4] 22x77°, [T1] 113x48°, [T2] 137x52°, [T2-2] 150x60°, [T2BL] 128x48°, [T3] 143x68°, [T3-2] 158x59°, [T3BL] 128x50°, [T4] 121x70°, [T4BL] 111x38°	4872 - 6891 lm	52 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.753-US	TURA 3x12 LED	[P4] 22x77°, [T1] 113x48°, [T2] 137x52°, [T2-2] 150x60°, [T2BL] 128x48°, [T3] 143x68°, [T3-2] 158x59°, [T3BL] 128x50°, [T4] 121x70°, [T4BL] 127x32°	7308 - 10307 lm	80 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.754-US	TURA 4x12 LED	[P4] 22x77°, [T1] 113x48°, [T2] 137x52°, [T2-2] 150x60°, [T2BL] , [T3] 143x68°, [T3-2] 158x59°, [T3BL] , [T4] 121x70°, [T4BL] 111x38°	9744 - 13744 lm	105 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.755-US	TURA 1x16 LED	[T2] 137x52°, [T3] 143x68°	3443 - 4105 lm	35 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs

LL2036.756-US	TURA 2x16 LED	[T2] 137x52°, [T3] 143x68°	7746 - 9234 lm	70 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.757-US	TURA 3x16 LED	[T2] 137x52°, [T3] 143x68°	10329 - 12314 lm	105 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	22 lbs
LL2036.758-US	TURA 4x16 LED	[T2] 137x52°, [T3] 143x68°	15196 - 16418 lm	136 W	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70	On/Off, 0-10V	25.3 lb

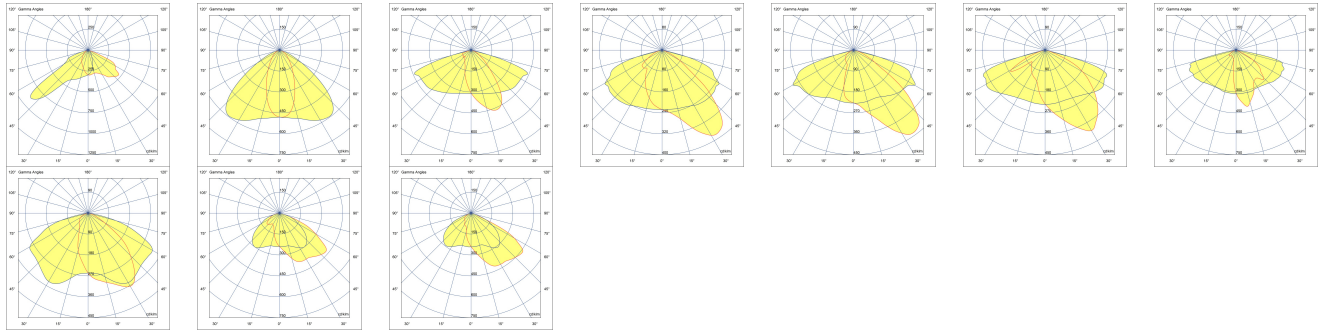

**[P4]**  
Pedestrian crosswalk distribution

**[T1]**  
Type I

**[T2]**  
Type II

**[T2-2]**  
Type II

**[T2BL]**  
Type II with Backlight shield

**[T3]**  
Type III

**[T3-2]**  
Type III



**[T3BL]**  
Type III with Backlight shield




**[T4]**  
Type IV



**[T4BL]**  
Type IV with Backlight shield


## Extras

External surge protection



**SP10**  
10 kV

Connectivity



**NM7**  
7 Pin NEMA socket

Luminaire body options




**DPC**  
Double powder coating


Light output



**CLO**  
Constant light output



**[HM3]**  
Anthracite  
gray



**[HM4]**  
Light gray



**[CC]**  
Custom  
color  
(Please  
specify RAL  
code)