
#### **MOLTO**






Robust In-ground Family with **Powerful Optics** 

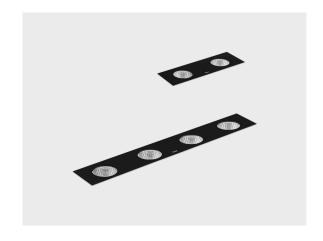

Multiple lengths, precisely controlled optics, and hardwearing characteristics make the "walk-over" MOLTO family stand out for facade grazing applications in high-end architectural projects.

- Equipped with HEPER's Hybrid (HYB) module
- Perfect beam control through multifaceted reflectors (HYB)
- Optimized light distribution with secondary reflector technology
- Extra narrow or medium beam angle options (HYB)
- Easy installation with in-ground housing and IP rated connectors

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LR9012.690-EN	MOLTO 2 Hybrid	[S] 7°, [N] 26°,	1678 - 2038 lm	18 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	2.66 kg
LR9012.695-EN	MOLTO 4 Hybrid	[S] 7°, [N] 26°,	3355 - 4076 lm	35 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	5.37 kg
LR9012.697-EN	MOLTO 6 Hybrid	[S] 7°, [N] 26°,	4969 - 6052 lm	50 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	7.75 kg

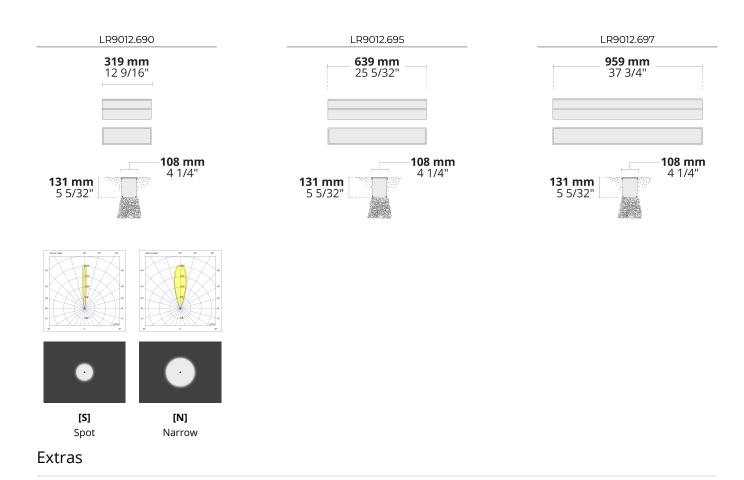


Consult the factory

120-277V 50/60Hz

UNI 120-277V 50/60Hz

### Accessories (Included)

## Accessories (To be ordered separately)

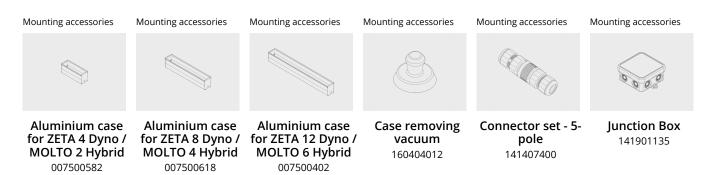

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

# HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 09.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.



**[SS]**Stainless
steel