
MOLTO

Robust In-ground Family with Powerful Optics



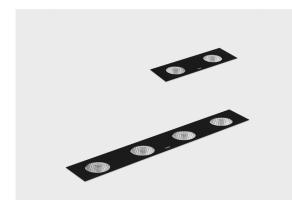


Multiple lengths, precisely controlled optics, and hardwearing characteristics make the "walk-over" MOLTO family stand out for facade grazing applications in high-end architectural projects.

- Equipped with HEPER's Hybrid (HYB) module
- Perfect beam control through multifaceted reflectors (HYB)
- Optimized light distribution with secondary reflector technology
- Extra narrow or medium beam angle options (HYB)
- Easy installation with in-ground housing and IP rated connectors

PHASED-OUT

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LR9012.690-US	MOLTO 2 Hybrid	[S] 7°, [N] 26°,	1678 - 2038 lm	18 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	5.8 lbs
LR9012.695-US	MOLTO 4 Hybrid	[S] 7°, [N] 26°,	3355 - 4076 lm	35 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	11.8 lbs
LR9012.697-US	MOLTO 6 Hybrid	[S] 7°, [N] 26°,	4969 - 6052 lm	50 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	17 lbs

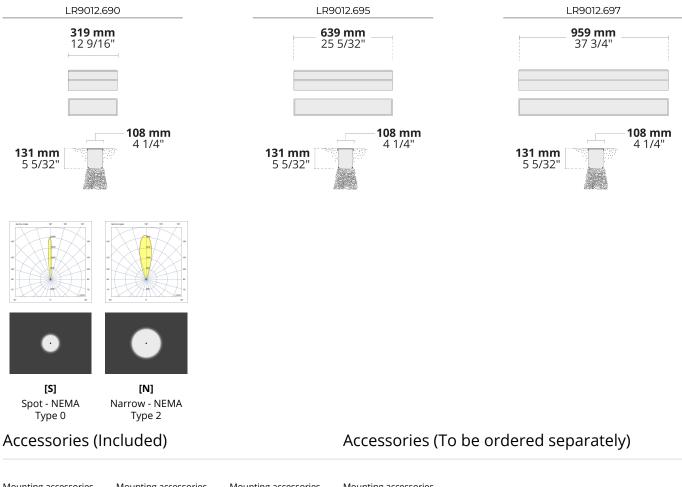



Mounting accessories



Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid 007500402

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com



[SS] Stainless steel

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.