
## **MOLTO**

## Robust In-ground Family with Powerful Optics




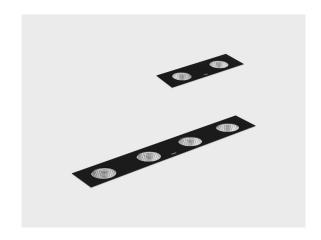

Multiple lengths, precisely controlled optics, and hardwearing characteristics make the "walk-over" MOLTO family stand out for facade grazing applications in high-end architectural projects.


- Equipped with HEPER's Hybrid (HYB) module
- Perfect beam control through multifaceted reflectors (HYB)
- Optimized light distribution with secondary reflector technology
- Extra narrow or medium beam angle options (HYB)
- Easy installation with in-ground housing and IP rated connectors

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LR9012.690-US	MOLTO 2 Hybrid	[S] 7°, [N] 26°,	1678 - 2038 lm	18 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	5.8 lbs
LR9012.695-US	MOLTO 4 Hybrid	[S] 7°, [N] 26°,	3355 - 4076 lm	35 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	11.8 lbs
LR9012.697-US	MOLTO 6 Hybrid	[S] 7°, [N] 26°,	4969 - 6052 lm	50 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	17 lbs

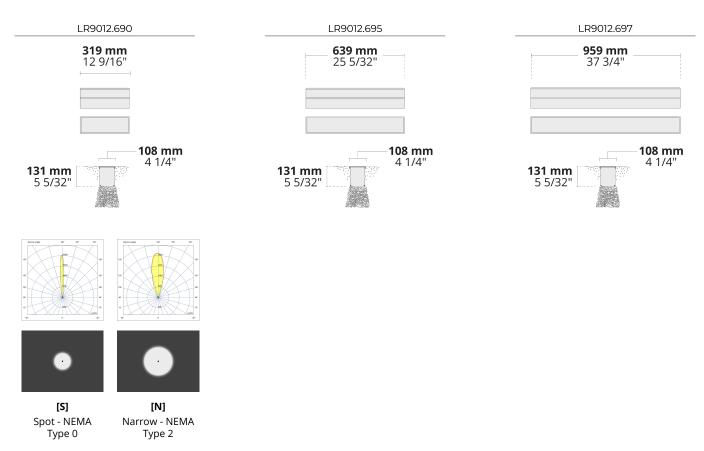

## Accessories (Included)

## Accessories (To be ordered separately)

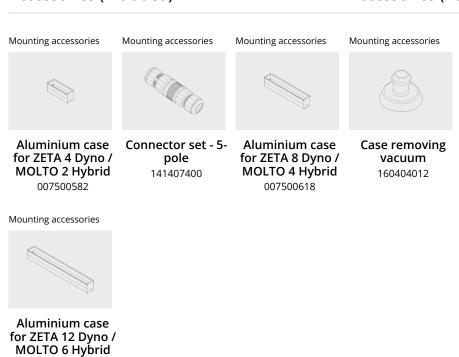

007500402



**[SS]**Stainless
steel