
WEDGE

Reliable and flexible

СЕ ЦКА ІКОВ ІР67 →





WEDGE offers various beam angle options in a highly durable body.

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LR9003.531-EN	WEDGE		502 - 650 lm	6 W	3000 K CRI 80, 4000 K CRI 70	On/Off	1.9 kg

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH Ahornweg 5a, 58675 Hemer, Germany

infoEU@hepergroup.com

+49 237 2901 2975

We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards. 1/2

Extras


Consult the factory

120-277V 50/60Hz

UNI 120-277V 50/60Hz

Accessories (Included)

Accessories (To be ordered separately)

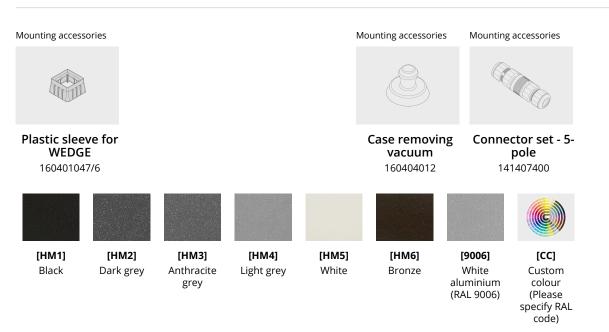

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.