

AQSA

Scalable and Flexible Product Family




Multiple lengths, optical possibilities, and various mounting options make the AQSA family stand out for the illumination tasks of contemporary architectural projects.


- Equipped with long-lasting high-power LEDs
- 4 different light distribution options from narrow to elliptical
- Various mounting possibilities with angle adjustment bracket or long bracket
- Easy installation and maintenance
- Different lengths and lumen packages in order to comply with any project needs

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control	Weight
LW7034.557-US	AQSA 1'	[EL] 147x106°, [EL-2] 41x13°, [N] 20°, [MN] 35°, [M] 65°,	540 - 1517 lm	6 - 12 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	3.7 lbs
LW7034.558-US	AQSA 1.6'	[EL] 147x106°, [EL-2] 41x13°, [N] 20°, [MN] 35°, [M] 65°,	1080 - 3034 lm	11 - 22 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	5.8 lbs
LW7034.516-US	AQSA 2.5'	[EL] 147x106°, [EL-2] 41x13°, [N] 20°, [MN] 35°, [M] 65°,	1620 - 4551 lm	16 - 33 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	7.8 lbs
LW7034.559-US	AQSA 3.3'	[EL] 147x106°, [EL-2] 41x13°, [N] 20°, [MN] 35°, [M] 65°,	2157 - 6068 lm	22 - 44 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, 0-10V	11 lbs


LW7034.516-EN

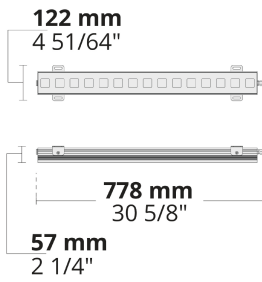



LW7034.557-EN

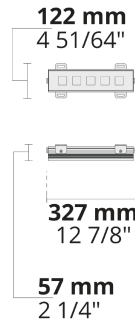

LW7034.558-EN

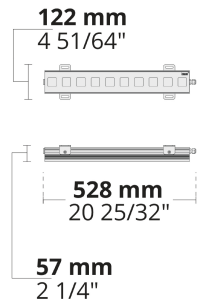

LW7034.559-EN

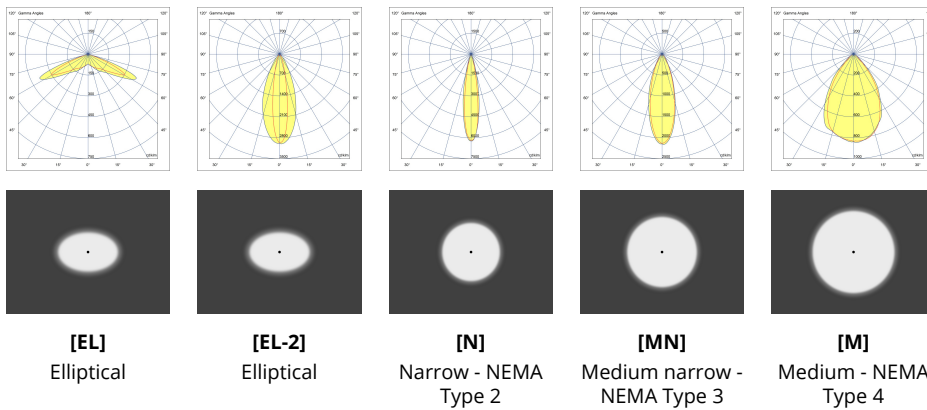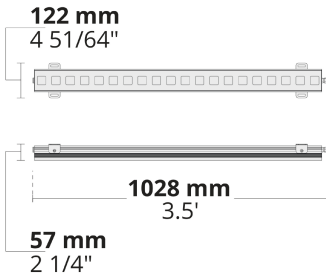

Extras


Mounting options



ASB

Angle setting bracket

Mounting options




LB


Long bracket




[HM1]
Black




[HM2]
Dark gray



[HM3]
Anthracite
gray



[HM4]
Light gray



[HM5]
White



[HM6]
Bronze



[CC]
Custom
color
(Please
specify RAL
code)