

REGIO IN

Flexible High/Low Bay Product Family
with Extreme Power

CE UK CA IK08 IP66




PHASED-
OUT

Multiple sizes, flexible optics, and high-power light output options make the REGIO family stand out for the illumination tasks for warehouses, commercial buildings, airport ceilings and industrial factories.




- Equipped with high-efficiency and long-lasting LED light source
- Glare management with special lens system
- 5 different beam angle options
- Durable material and component selection for harsh working conditions
- Easy installation and maintenance with modular structure

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LF8037.521-EN	REGIO IN 1 Module	[N] 22°, [MN] 30°, [W] 111°	23372 - 27826 lm	229 W	3000 K CRI 80, 4000 K CRI 80	On/Off, DALI	10.06 kg
LF8037.522-EN	REGIO IN 2 Module	[N] 22°, [MN] 30°, [W] 111°	46744 - 55652 lm	459 - 460 W	3000 K CRI 80, 4000 K CRI 80	On/Off, DALI	16.64 kg

LF8037.521



LF8037.522

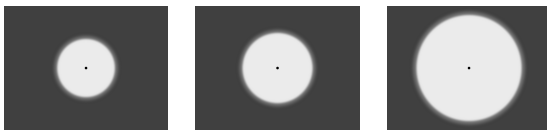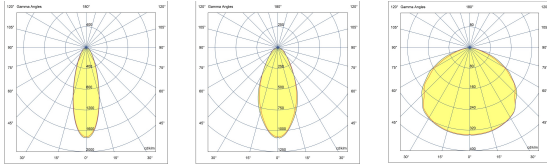

[N] Narrow
[MN] Medium narrow
[W] Wide

Extras

Consult the factory


120-277V
50/60Hz

UNI
120-277V 50/60Hz


Luminaire body options

DPC

DPC
Double powder
coating



[HM3]
Anthracite
grey



[HM4]
Light grey



[CC]
Custom
colour
(Please
specify RAL
code)