




# VESTA 4 LED

LB6018.500-US

IK05 IP65 

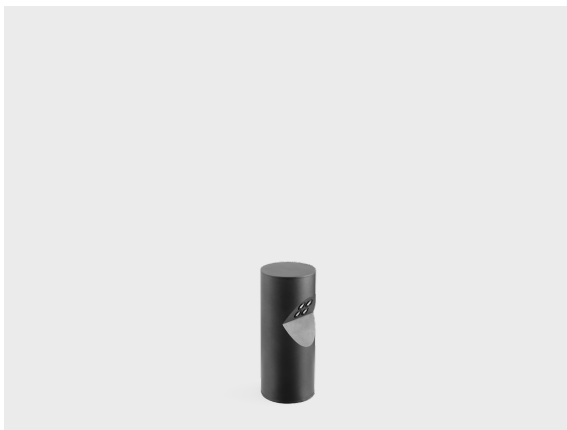

[SLFB]

Special linear,  
Forward throw

## Variants

<b>Light distribution</b>	[SLFB] 85° x 90°
<b>Nominal LED lumens flux</b>	1040 - 1080 lm
<b>Nominal LED power</b>	4 W (350 mA)
<b>Rated luminaire lumens flux</b>	370 - 400 lm
<b>Rated luminaire power</b>	6 W
<b>Colour temperature</b>	4000 K CRI 70, 3000 K CRI 80
<b>Lifetime L90B50</b>	>145, 000 hours
<b>Lifetime L80B50</b>	>145, 000 hours

## Options

<b>Control</b>	On/Off
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Product colours</b>	

## Extras








<b>Finishing options</b>	Double coating
--------------------------	----------------

## Technical information

<b>Housing</b>	Corrosion resistant aluminum housing
<b>Finishing</b>	Electrostatic powder coating
<b>Fasteners</b>	Stainless steel (grade 304)
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Weight</b>	11.7 lb
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	3/3 kV
<b>Power factor</b>	> 0.40
<b>Through wiring</b>	Single cable entry
<b>Cable</b>	0.5 m of flexible cable

Project name		Type		Quantity	
Date		Note			
<b>LB6018.500-US-</b> _ _ _ _ _					

Light distribution	Drive current (LED power)	Colour temperature	Control	Input voltage
<b>SLFB</b> Special linear, Forward throw - 85° x 90°	<b>350</b> 4 W (350 mA)	<b>740</b> 4000 K CRI 70  <b>830</b> 3000 K CRI 80	<b>ONOFF</b> On/Off	<b>UNI</b> 120-277V 50/60Hz

Insulation class	Product colours	Extras
<b>C1</b> Class I	<b>HM1</b>  Black (Textured)  <b>HM2</b>  Dark grey (Textured)  <b>HM3</b>  Anthracite grey (Textured)  <b>HM4</b>  Light grey (Textured)  <b>HM5</b>  White (Textured)  <b>HM6</b>  Bronze (Textured)  <b>CC</b>  Custom Colour (Please specify RAL code)	Finishing options
		<b>DC</b> Double coating