


VESTA S L 4 LED


LB6044.500-US



PHASED-OUT

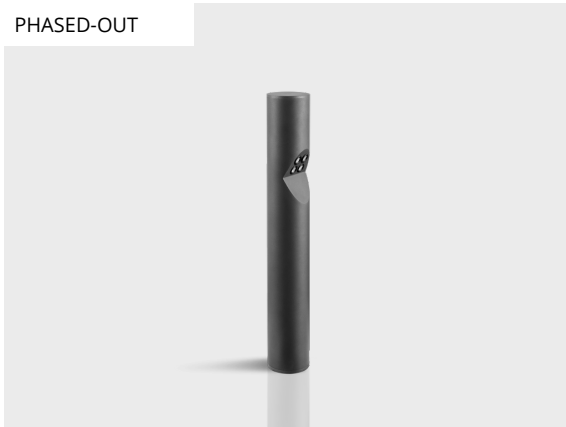

Ø165 mm
6 1/2"



[SLFB]

Special linear,
Forward throw -
85x90°

Configurations

Light distribution	[SLFB] 85x90°
Delivered lumens flux	370 - 400 lm
Rated input power	6 W
Color temperature	3000 K CRI 80, 4000 K CRI 70
Lifetime L90 (hour)	>145, 000
Lifetime L80 (hour)	>145, 000

Options

Control

On/Off

Product colors



Extras

Luminaire body options


Double powder coating

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.1 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










629J014

629J014

Project name		Type		Quantity	
Date		Note			

LB6044.500-US-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 85x90°	[350] 6 W	[830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Luminaire body options	Anchor bolts			
[DPC] Double powder coating	[629]014 629J014			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6044.500-US-SLFB-350-740	[SLFB] Special linear, Forward throw - 85x90°	400 lm	6 W	4000 K CRI 70	On/Off
LB6044.500-US-SLFB-350-830	[SLFB] Special linear, Forward throw - 85x90°	370 lm	6 W	3000 K CRI 80	On/Off