
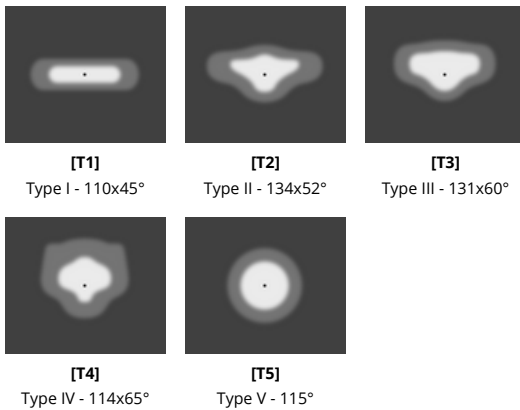


DOMINI AFX MIDI 1 Module

LB6047.871-US

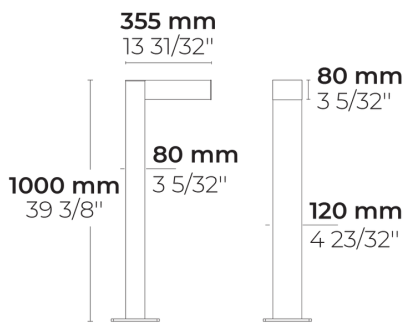

Configurations

Light distribution	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°
Delivered lumens flux	944 - 2272 lm
Rated input power	10 - 20 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U0-G0, B0-U0-G0, B1-U0-G1
Lifetime L90 (hour)	>102, 000
Lifetime L80 (hour)	>102, 000

Options

Control	On/Off, 0-10V
Product colors	
Height	3.3'

Extras


Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.54 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.

Accessories (To be ordered separately)

Anchor bolts










90AJ001

90AJ001

Project name		Type		Quantity	
Date		Note			

LB6047.871-US-____-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[T1] Type I - 110x45°	[350] 10 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black
[T2] Type II - 134x52°	[500] 13.5 W	[830] 3000 K CRI 80	[0-10V] 0-10V	[HM2]  Dark gray
[T3] Type III - 131x60°	[700] 18 W	[740] 4000 K CRI 70		[HM3]  Anthracite gray
[T4] Type IV - 114x65°	[700] 20 W	[840] 4000 K CRI 80		[HM4]  Light gray
[T5] Type V - 115°				[HM5]  White
				[HM6]  Bronze
			[CC]  Custom color (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 3.3'	Luminaire body options	Anchor bolts		
[HC]	[DPC] Double powder coating	[90AJ001] 90AJ001		

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6047.871-US-T1-350-740	[T1] Type I - 110x45°	1158 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T1-350-827	[T1] Type I - 110x45°	1013 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-350-830	[T1] Type I - 110x45°	1013 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-350-840	[T1] Type I - 110x45°	1013 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-500-740	[T1] Type I - 110x45°	1695 lm	13.5 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T1-500-827	[T1] Type I - 110x45°	1449 lm	13.5 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-500-830	[T1] Type I - 110x45°	1449 lm	13.5 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-500-840	[T1] Type I - 110x45°	1449 lm	13.5 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-700-740	[T1] Type I - 110x45°	2223 lm	18 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T1-700-827	[T1] Type I - 110x45°	1872 lm	18 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-700-830	[T1] Type I - 110x45°	1872 lm	18 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T1-700-840	[T1] Type I - 110x45°	1872 lm	18 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-350-740	[T2] Type II - 134x52°	1134 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T2-2-350-827	[T2] Type II - 134x52°	991 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-350-830	[T2] Type II - 134x52°	991 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-350-840	[T2] Type II - 134x52°	991 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-500-740	[T2] Type II - 134x52°	1659 lm	13.5 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T2-2-500-827	[T2] Type II - 134x52°	1418 lm	13.5 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-500-830	[T2] Type II - 134x52°	1418 lm	13.5 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-500-840	[T2] Type II - 134x52°	1418 lm	13.5 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-700-740	[T2] Type II - 134x52°	2176 lm	18 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T2-2-700-827	[T2] Type II - 134x52°	1833 lm	18 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-700-830	[T2] Type II - 134x52°	1833 lm	18 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T2-2-700-840	[T2] Type II - 134x52°	1833 lm	18 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-350-740	[T3] Type III - 131x60°	1079 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T3-350-827	[T3] Type III - 131x60°	944 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-350-830	[T3] Type III - 131x60°	944 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-350-840	[T3] Type III - 131x60°	944 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-500-740	[T3] Type III - 131x60°	1579 lm	13.5 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T3-500-827	[T3] Type III - 131x60°	1350 lm	13.5 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-500-830	[T3] Type III - 131x60°	1350 lm	13.5 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-500-840	[T3] Type III - 131x60°	1350 lm	13.5 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-700-740	[T3] Type III - 131x60°	2071 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T3-700-827	[T3] Type III - 131x60°	1744 lm	18 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-700-830	[T3] Type III - 131x60°	1744 lm	18 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T3-700-840	[T3] Type III - 131x60°	1744 lm	18 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-350-740	[T4] Type IV - 114x65°	1118 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T4-350-827	[T4] Type IV - 114x65°	978 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-350-830	[T4] Type IV - 114x65°	978 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-350-840	[T4] Type IV - 114x65°	978 lm	10 W	4000 K CRI 80	On/Off, 0-10V

LB6047.871-US-T4-500-740	[T4] Type IV - 114x65°	1636 lm	13.5 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T4-500-827	[T4] Type IV - 114x65°	1398 lm	13.5 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-500-830	[T4] Type IV - 114x65°	1398 lm	13.5 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-500-840	[T4] Type IV - 114x65°	1398 lm	13.5 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-700-740	[T4] Type IV - 114x65°	2146 lm	18 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T4-700-827	[T4] Type IV - 114x65°	1807 lm	18 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-700-830	[T4] Type IV - 114x65°	1807 lm	18 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T4-700-840	[T4] Type IV - 114x65°	1807 lm	18 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-350-740	[T5] Type V - 115°	1183 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T5-350-827	[T5] Type V - 115°	1035 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-350-830	[T5] Type V - 115°	1035 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-350-840	[T5] Type V - 115°	1035 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-500-740	[T5] Type V - 115°	1732 lm	13.5 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T5-500-827	[T5] Type V - 115°	1480 lm	13.5 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-500-830	[T5] Type V - 115°	1480 lm	13.5 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-500-840	[T5] Type V - 115°	1480 lm	13.5 W	4000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-700-740	[T5] Type V - 115°	2272 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.871-US-T5-700-827	[T5] Type V - 115°	1913 lm	18 W	2700 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-700-830	[T5] Type V - 115°	1913 lm	18 W	3000 K CRI 80	On/Off, 0-10V
LB6047.871-US-T5-700-840	[T5] Type V - 115°	1913 lm	18 W	4000 K CRI 80	On/Off, 0-10V