



DOMINI AFX MIDI 1 Module Duo

LB6047.872-EN

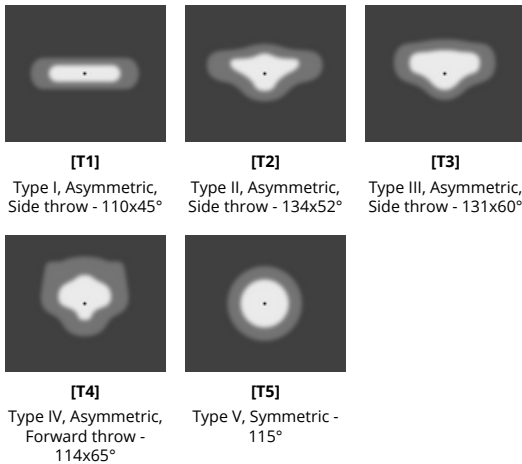

IK08 IP66

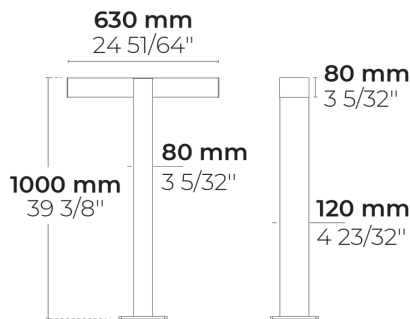

Variants

Light distribution	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°
Delivered lumens flux	1887 - 4544 lm
Rated input power	20 - 37 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U0-G0, B0-U0-G0, B1-U0-G1
Lifetime L90B50 (hour)	>102, 000
Lifetime L80B50 (hour)	>102, 000

Options

Control	On/Off
Product colours	
Height	1m,

Extras

Light output	Backlight Shield
Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.43 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.


HPR Pazarlama A.Ş.
 Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
 Sincan, 06909 Ankara, Turkey
 +90 312 267 54 30
 info@hepergroup.com

HEPER Europe GmbH
 Ahornweg 5a, 58675
 Hemer, Germany
 +49 237 2901 2975
 infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Anchorage



90AJ001

90AJ001

Flange covers










C6A2A

C6A2A

Project name		Type		Quantity	
Date		Note			

LB6047.872-EN-____-____-____-____-____**-EN-C1-**____-____-____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T1] Type I, Asymmetric, Side throw - 110x45°	[350] 20 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black
[T2] Type II, Asymmetric, Side throw - 134x52°	[500] 27 W	[830] 3000 K CRI 80		[HM2]  Dark grey
[T3] Type III, Asymmetric, Side throw - 131x60°	[700] 37 W	[740] 4000 K CRI 70		[HM3]  Anthracite grey
[T4] Type IV, Asymmetric, Forward throw - 114x65°		[840] 4000 K CRI 80		[HM4]  Light grey
[T5] Type V, Symmetric - 115°				[HM5]  White
			[HM6]  Bronze	
			[CC]  Custom colour (Please specify RAL code)	

Height	Extras	Accessories (<i>To be ordered separately</i>)
[H1] 1m [HC]	Light output	Anchorage
	[BS] Backlight Shield	[90AJ001] 90AJ001
	Consult the factory	Flange covers
	[UNI] 120-277V 50/60Hz	[C6A2A] C6A2A
	Luminaire body options	
[DPC] Double powder coating		

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6047.872-EN-T1-350-740	[T1] Type I, Asymmetric, Side throw - 110x45°	2316 lm	20 W	4000 K CRI 70	On/Off
LB6047.872-EN-T1-350-827	[T1] Type I, Asymmetric, Side throw - 110x45°	2026 lm	20 W	2700 K CRI 80	On/Off
LB6047.872-EN-T1-350-830	[T1] Type I, Asymmetric, Side throw - 110x45°	2026 lm	20 W	3000 K CRI 80	On/Off
LB6047.872-EN-T1-350-840	[T1] Type I, Asymmetric, Side throw - 110x45°	2026 lm	20 W	4000 K CRI 80	On/Off
LB6047.872-EN-T1-500-740	[T1] Type I, Asymmetric, Side throw - 110x45°	3389 lm	27 W	4000 K CRI 70	On/Off
LB6047.872-EN-T1-500-827	[T1] Type I, Asymmetric, Side throw - 110x45°	2897 lm	27 W	2700 K CRI 80	On/Off
LB6047.872-EN-T1-500-830	[T1] Type I, Asymmetric, Side throw - 110x45°	2897 lm	27 W	3000 K CRI 80	On/Off
LB6047.872-EN-T1-500-840	[T1] Type I, Asymmetric, Side throw - 110x45°	2897 lm	27 W	4000 K CRI 80	On/Off
LB6047.872-EN-T1-700-740	[T1] Type I, Asymmetric, Side throw - 110x45°	4447 lm	37 W	4000 K CRI 70	On/Off
LB6047.872-EN-T1-700-827	[T1] Type I, Asymmetric, Side throw - 110x45°	3744 lm	37 W	2700 K CRI 80	On/Off
LB6047.872-EN-T1-700-830	[T1] Type I, Asymmetric, Side throw - 110x45°	3744 lm	37 W	3000 K CRI 80	On/Off
LB6047.872-EN-T1-700-840	[T1] Type I, Asymmetric, Side throw - 110x45°	3744 lm	37 W	4000 K CRI 80	On/Off
LB6047.872-EN-T2-2-350-740	[T2] Type II, Asymmetric, Side throw - 134x52°	2267 lm	20 W	4000 K CRI 70	On/Off
LB6047.872-EN-T2-2-350-827	[T2] Type II, Asymmetric, Side throw - 134x52°	1983 lm	20 W	2700 K CRI 80	On/Off
LB6047.872-EN-T2-2-350-830	[T2] Type II, Asymmetric, Side throw - 134x52°	1983 lm	20 W	3000 K CRI 80	On/Off
LB6047.872-EN-T2-2-350-840	[T2] Type II, Asymmetric, Side throw - 134x52°	1983 lm	20 W	4000 K CRI 80	On/Off
LB6047.872-EN-T2-2-500-740	[T2] Type II, Asymmetric, Side throw - 134x52°	3318 lm	27 W	4000 K CRI 70	On/Off
LB6047.872-EN-T2-2-500-827	[T2] Type II, Asymmetric, Side throw - 134x52°	2836 lm	27 W	2700 K CRI 80	On/Off
LB6047.872-EN-T2-2-500-830	[T2] Type II, Asymmetric, Side throw - 134x52°	2836 lm	27 W	3000 K CRI 80	On/Off
LB6047.872-EN-T2-2-500-840	[T2] Type II, Asymmetric, Side throw - 134x52°	2836 lm	27 W	4000 K CRI 80	On/Off
LB6047.872-EN-T2-2-700-740	[T2] Type II, Asymmetric, Side throw - 134x52°	4353 lm	37 W	4000 K CRI 70	On/Off
LB6047.872-EN-T2-2-700-827	[T2] Type II, Asymmetric, Side throw - 134x52°	3666 lm	37 W	2700 K CRI 80	On/Off
LB6047.872-EN-T2-2-700-830	[T2] Type II, Asymmetric, Side throw - 134x52°	3666 lm	37 W	3000 K CRI 80	On/Off
LB6047.872-EN-T2-2-700-840	[T2] Type II, Asymmetric, Side throw - 134x52°	3666 lm	37 W	4000 K CRI 80	On/Off
LB6047.872-EN-T3-350-740	[T3] Type III, Asymmetric, Side throw - 131x60°	2158 lm	20 W	4000 K CRI 70	On/Off
LB6047.872-EN-T3-350-827	[T3] Type III, Asymmetric, Side throw - 131x60°	1887 lm	20 W	2700 K CRI 80	On/Off
LB6047.872-EN-T3-350-830	[T3] Type III, Asymmetric, Side throw - 131x60°	1887 lm	20 W	3000 K CRI 80	On/Off
LB6047.872-EN-T3-350-840	[T3] Type III, Asymmetric, Side throw - 131x60°	1887 lm	20 W	4000 K CRI 80	On/Off
LB6047.872-EN-T3-500-740	[T3] Type III, Asymmetric, Side throw - 131x60°	3158 lm	27 W	4000 K CRI 70	On/Off
LB6047.872-EN-T3-500-827	[T3] Type III, Asymmetric, Side throw - 131x60°	2699 lm	27 W	2700 K CRI 80	On/Off
LB6047.872-EN-T3-500-830	[T3] Type III, Asymmetric, Side throw - 131x60°	2699 lm	27 W	3000 K CRI 80	On/Off
LB6047.872-EN-T3-500-840	[T3] Type III, Asymmetric, Side throw - 131x60°	2699 lm	27 W	4000 K CRI 80	On/Off
LB6047.872-EN-T3-700-740	[T3] Type III, Asymmetric, Side throw - 131x60°	4143 lm	37 W	4000 K CRI 70	On/Off
LB6047.872-EN-T3-700-827	[T3] Type III, Asymmetric, Side throw - 131x60°	3489 lm	37 W	2700 K CRI 80	On/Off
LB6047.872-EN-T3-700-830	[T3] Type III, Asymmetric, Side throw - 131x60°	3489 lm	37 W	3000 K CRI 80	On/Off
LB6047.872-EN-T3-700-840	[T3] Type III, Asymmetric, Side throw - 131x60°	3489 lm	37 W	4000 K CRI 80	On/Off
LB6047.872-EN-T4-350-740	[T4] Type IV, Asymmetric, Forward throw - 114x65°	2236 lm	20 W	4000 K CRI 70	On/Off
LB6047.872-EN-T4-350-827	[T4] Type IV, Asymmetric, Forward throw - 114x65°	1955 lm	20 W	2700 K CRI 80	On/Off

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

LB6047.872-EN-T4-350-830	[T4] Type IV, Asymmetric, Forward throw - 114x65°	1955 lm	20 W	3000 K CRI 80	On/Off
LB6047.872-EN-T4-350-840	[T4] Type IV, Asymmetric, Forward throw - 114x65°	1955 lm	20 W	4000 K CRI 80	On/Off
LB6047.872-EN-T4-500-740	[T4] Type IV, Asymmetric, Forward throw - 114x65°	3272 lm	27 W	4000 K CRI 70	On/Off
LB6047.872-EN-T4-500-827	[T4] Type IV, Asymmetric, Forward throw - 114x65°	2797 lm	27 W	2700 K CRI 80	On/Off
LB6047.872-EN-T4-500-830	[T4] Type IV, Asymmetric, Forward throw - 114x65°	2797 lm	27 W	3000 K CRI 80	On/Off
LB6047.872-EN-T4-500-840	[T4] Type IV, Asymmetric, Forward throw - 114x65°	2797 lm	27 W	4000 K CRI 80	On/Off
LB6047.872-EN-T4-700-740	[T4] Type IV, Asymmetric, Forward throw - 114x65°	4292 lm	37 W	4000 K CRI 70	On/Off
LB6047.872-EN-T4-700-827	[T4] Type IV, Asymmetric, Forward throw - 114x65°	3615 lm	37 W	2700 K CRI 80	On/Off
LB6047.872-EN-T4-700-830	[T4] Type IV, Asymmetric, Forward throw - 114x65°	3615 lm	37 W	3000 K CRI 80	On/Off
LB6047.872-EN-T4-700-840	[T4] Type IV, Asymmetric, Forward throw - 114x65°	3615 lm	37 W	4000 K CRI 80	On/Off
LB6047.872-EN-T5-350-740	[T5] Type V, Symmetric - 115°	2367 lm	20 W	4000 K CRI 70	On/Off
LB6047.872-EN-T5-350-827	[T5] Type V, Symmetric - 115°	2070 lm	20 W	2700 K CRI 80	On/Off
LB6047.872-EN-T5-350-830	[T5] Type V, Symmetric - 115°	2070 lm	20 W	3000 K CRI 80	On/Off
LB6047.872-EN-T5-350-840	[T5] Type V, Symmetric - 115°	2070 lm	20 W	4000 K CRI 80	On/Off
LB6047.872-EN-T5-500-740	[T5] Type V, Symmetric - 115°	3464 lm	27 W	4000 K CRI 70	On/Off
LB6047.872-EN-T5-500-827	[T5] Type V, Symmetric - 115°	2961 lm	27 W	2700 K CRI 80	On/Off
LB6047.872-EN-T5-500-830	[T5] Type V, Symmetric - 115°	2961 lm	27 W	3000 K CRI 80	On/Off
LB6047.872-EN-T5-500-840	[T5] Type V, Symmetric - 115°	2961 lm	27 W	4000 K CRI 80	On/Off
LB6047.872-EN-T5-700-740	[T5] Type V, Symmetric - 115°	4544 lm	37 W	4000 K CRI 70	On/Off
LB6047.872-EN-T5-700-827	[T5] Type V, Symmetric - 115°	3827 lm	37 W	2700 K CRI 80	On/Off
LB6047.872-EN-T5-700-830	[T5] Type V, Symmetric - 115°	3827 lm	37 W	3000 K CRI 80	On/Off
LB6047.872-EN-T5-700-840	[T5] Type V, Symmetric - 115°	3827 lm	37 W	4000 K CRI 80	On/Off

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.04.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.