
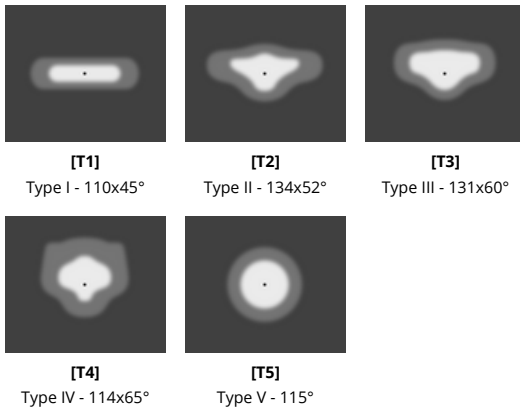


# DOMINI AFX MIDI 1 Module Duo

LB6047.872-US

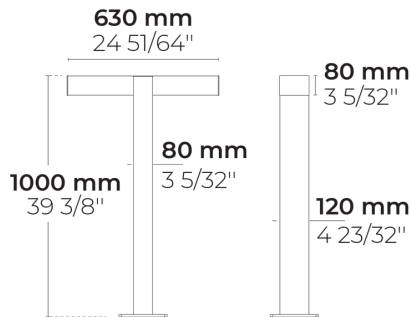

## Configurations

<b>Light distribution</b>	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°
<b>Delivered lumens flux</b>	1887 - 4544 lm
<b>Rated input power</b>	20 - 37 W
<b>Color temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>BUG rating</b>	B1-U0-G0, B0-U0-G0, B1-U0-G1
<b>Lifetime L90 (hour)</b>	>102, 000
<b>Lifetime L80 (hour)</b>	>102, 000

## Options

<b>Control</b>	On/Off, 0-10V
<b>Product colors</b>	
<b>Height</b>	3.3',

## Extras

<b>Luminaire body options</b>	Double powder coating
-------------------------------	-----------------------


## Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	16.34 lbs
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	2/2 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	20" of outdoor use rated flexible power cord
<b>Notes</b>	3000K CCT or warmer must be selected to be DarkSky International certified.

## Accessories (To be ordered separately)

---

### Anchor bolts










90AJ001

90AJ001

Project name		Type		Quantity	
Date		Note			

**LB6047.872-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T1]</b> Type I - 110x45°	<b>[350]</b> 20 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
<b>[T2]</b> Type II - 134x52°	<b>[500]</b> 27 W	<b>[830]</b> 3000 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b>  Dark gray
<b>[T3]</b> Type III - 131x60°	<b>[700]</b> 37 W	<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite gray
<b>[T4]</b> Type IV - 114x65°		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light gray
<b>[T5]</b> Type V - 115°				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
<b>Height</b>	<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>		
<b>[H1]</b> 3.3'	<b>Luminaire body options</b>	<b>Anchor bolts</b>		
<b>[HC]</b>	<b>[DPC]</b> Double powder coating	<b>[90AJ001]</b> 90AJ001		

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6047.872-US-T1-350-740	[T1] Type I - 110x45°	2316 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T1-350-827	[T1] Type I - 110x45°	2026 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-350-830	[T1] Type I - 110x45°	2026 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-350-840	[T1] Type I - 110x45°	2026 lm	20 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-500-740	[T1] Type I - 110x45°	3389 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T1-500-827	[T1] Type I - 110x45°	2897 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-500-830	[T1] Type I - 110x45°	2897 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-500-840	[T1] Type I - 110x45°	2897 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-700-740	[T1] Type I - 110x45°	4447 lm	37 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T1-700-827	[T1] Type I - 110x45°	3744 lm	37 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-700-830	[T1] Type I - 110x45°	3744 lm	37 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T1-700-840	[T1] Type I - 110x45°	3744 lm	37 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-350-740	[T2] Type II - 134x52°	2267 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T2-2-350-827	[T2] Type II - 134x52°	1983 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-350-830	[T2] Type II - 134x52°	1983 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-350-840	[T2] Type II - 134x52°	1983 lm	20 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-500-740	[T2] Type II - 134x52°	3318 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T2-2-500-827	[T2] Type II - 134x52°	2836 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-500-830	[T2] Type II - 134x52°	2836 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-500-840	[T2] Type II - 134x52°	2836 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-700-740	[T2] Type II - 134x52°	4353 lm	37 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T2-2-700-827	[T2] Type II - 134x52°	3666 lm	37 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-700-830	[T2] Type II - 134x52°	3666 lm	37 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T2-2-700-840	[T2] Type II - 134x52°	3666 lm	37 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-350-740	[T3] Type III - 131x60°	2158 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T3-350-827	[T3] Type III - 131x60°	1887 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-350-830	[T3] Type III - 131x60°	1887 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-350-840	[T3] Type III - 131x60°	1887 lm	20 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-500-740	[T3] Type III - 131x60°	3158 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T3-500-827	[T3] Type III - 131x60°	2699 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-500-830	[T3] Type III - 131x60°	2699 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-500-840	[T3] Type III - 131x60°	2699 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-700-740	[T3] Type III - 131x60°	4143 lm	37 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T3-700-827	[T3] Type III - 131x60°	3489 lm	37 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-700-830	[T3] Type III - 131x60°	3489 lm	37 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T3-700-840	[T3] Type III - 131x60°	3489 lm	37 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-350-740	[T4] Type IV - 114x65°	2236 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T4-350-827	[T4] Type IV - 114x65°	1955 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-350-830	[T4] Type IV - 114x65°	1955 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-350-840	[T4] Type IV - 114x65°	1955 lm	20 W	4000 K CRI 80	On/Off, 0-10V

LB6047.872-US-T4-500-740	[T4] Type IV - 114x65°	3272 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T4-500-827	[T4] Type IV - 114x65°	2797 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-500-830	[T4] Type IV - 114x65°	2797 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-500-840	[T4] Type IV - 114x65°	2797 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-700-740	[T4] Type IV - 114x65°	4292 lm	37 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T4-700-827	[T4] Type IV - 114x65°	3615 lm	37 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-700-830	[T4] Type IV - 114x65°	3615 lm	37 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T4-700-840	[T4] Type IV - 114x65°	3615 lm	37 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-350-740	[T5] Type V - 115°	2367 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T5-350-827	[T5] Type V - 115°	2070 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-350-830	[T5] Type V - 115°	2070 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-350-840	[T5] Type V - 115°	2070 lm	20 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-500-740	[T5] Type V - 115°	3464 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T5-500-827	[T5] Type V - 115°	2961 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-500-830	[T5] Type V - 115°	2961 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-500-840	[T5] Type V - 115°	2961 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-700-740	[T5] Type V - 115°	4544 lm	37 W	4000 K CRI 70	On/Off, 0-10V
LB6047.872-US-T5-700-827	[T5] Type V - 115°	3827 lm	37 W	2700 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-700-830	[T5] Type V - 115°	3827 lm	37 W	3000 K CRI 80	On/Off, 0-10V
LB6047.872-US-T5-700-840	[T5] Type V - 115°	3827 lm	37 W	4000 K CRI 80	On/Off, 0-10V