


# LENA

LB6049.563-US



PHASED-OUT

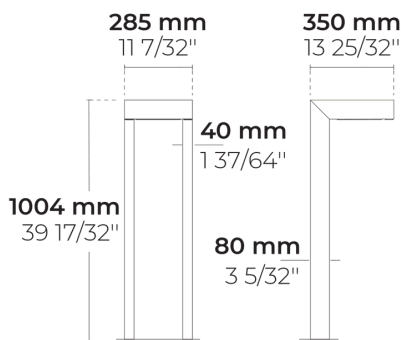

[SYM]  
Symmetric - 360°

## Configurations

<b>Light distribution</b>	[SYM] 360°
<b>Delivered lumens flux</b>	850 - 1000 lm
<b>Rated input power</b>	15 W
<b>Color temperature</b>	3000 K CRI 80, 4000 K CRI 70
<b>BUG rating</b>	B1-U0-G0
<b>Lifetime L90 (hour)</b>	>145,000
<b>Lifetime L80 (hour)</b>	>145,000

## Options

<b>Control</b>	On/Off
<b>Product colors</b>	

## Extras

<b>Luminaire body options</b>	Double powder coating
-------------------------------	-----------------------


## Technical information

<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Glass / Diffusor</b>	UV stable, bio-based polycarbonate diffusor
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	15.67 lbs
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-30...50°C

## Accessories (To be ordered separately)

---








### Anchor bolts



**626J014**

626J014

Project name		Type		Quantity	
Date		Note			
<b>LB6049.563-US-</b> ____-____-____-____-____-____					

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM] Symmetric - 360°	[350] 15 W	[830] 3000 K CRI 80  [740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Anchor bolts</b>			
[DPC] Double powder coating	[626]014 626J014			

<b>Configuration code</b>	<b>Light distribution</b>	<b>Delivered lumens flux</b>	<b>Rated input power</b>	<b>Color temperature</b>	<b>Control</b>
LB6049.563-US-SYM-350-740	[SYM] Symmetric - 360°	1000 lm	15 W	4000 K CRI 70	On/Off
LB6049.563-US-SYM-350-830	[SYM] Symmetric - 360°	850 lm	15 W	3000 K CRI 80	On/Off