


# LENA

LB6049.563-US



PHASED-  
OUT

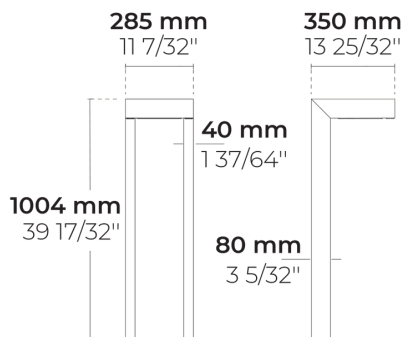

[SYM]  
Symmetric - 360°

## Configurations

Light distribution	[SYM] 360°
Delivered lumens flux	850 - 1000 lm
Rated input power	15 W
Color temperature	3000 K CRI 80, 4000 K CRI 70
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000

## Options

Control

On/Off

Product colors



## Extras

Luminaire body  
options


Double powder coating

## Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	15.67 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C

Accessories (To be ordered separately)

Anchor bolts










626J014

626J014

Project name				Type		Quantity	
Date		Note					

**LB6049.563-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM]</b> Symmetric - 360°	<b>[350]</b> 15 W	<b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<div> <b>[HM1]</b>  Black           </div> <div> <b>[HM2]</b>  Dark gray           </div> <div> <b>[HM3]</b>  Anthracite gray           </div> <div> <b>[HM4]</b>  Light gray           </div> <div> <b>[HM5]</b>  White           </div> <div> <b>[HM6]</b>  Bronze           </div> <div> <b>[CC]</b>  Custom color (Please specify RAL code)           </div>
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Anchor bolts</b>			
	<b>[626J014]</b> 626J014			
<b>[DPC]</b> Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6049.563-US-SYM-350-740	[SYM] Symmetric - 360°	1000 lm	15 W	4000 K CRI 70	On/Off
LB6049.563-US-SYM-350-830	[SYM] Symmetric - 360°	850 lm	15 W	3000 K CRI 80	On/Off