


POLSO S

LB6051.693-EN

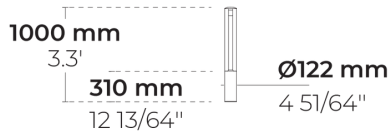


[SYM-3L]

Symmetric, Special effect: 3 lines - 38x117°

Variants

Light distribution	[SYM-3L] 38x117°
Delivered lumens flux	230 - 500 lm
Rated input power	6.5 - 10 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B0-U1-G0
Lifetime L90B50 (hour)	>72, 600
Lifetime L80B50 (hour)	>72, 600

Options

Control	On/Off, DALI
Product colours	
Height	1 m,

Extras


Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.6 kg
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)








Anchorage



6281002

6281002

Project name		Type		Quantity	
Date		Note			
LB6051.693-EN-____-____-____-____-EN-C1-____-____-____-____					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[350] 6.5 W [700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 1m [HC]	Consult the factory [UNI] 120-277V 50/60Hz Luminaire body options [DPC] Double powder coating	Anchorage [628I002] 628I002		

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6051.693-EN-SYM-3L-350-740	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	285 lm	6.5 W	4000 K CRI 70	On/Off, DALI
LB6051.693-EN-SYM-3L-350-827	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	230 lm	6.5 W	2700 K CRI 80	On/Off, DALI
LB6051.693-EN-SYM-3L-350-830	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	234 lm	6.5 W	3000 K CRI 80	On/Off, DALI
LB6051.693-EN-SYM-3L-350-840	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	259 lm	6.5 W	4000 K CRI 80	On/Off, DALI
LB6051.693-EN-SYM-3L-700-740	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	500 lm	10 W	4000 K CRI 70	On/Off, DALI
LB6051.693-EN-SYM-3L-700-827	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	398 lm	10 W	2700 K CRI 80	On/Off, DALI
LB6051.693-EN-SYM-3L-700-830	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	403 lm	10 W	3000 K CRI 80	On/Off, DALI
LB6051.693-EN-SYM-3L-700-840	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	452 lm	10 W	4000 K CRI 80	On/Off, DALI