


POLSO S

LB6051.693-US

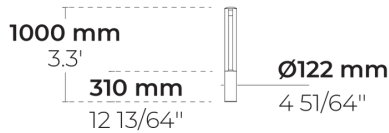

[SYM-3L]

Symmetric, Special effect: 3 lines - 38x117°

Configurations

Light distribution	[SYM-3L] 38x117°
Delivered lumens flux	230 - 500 lm
Rated input power	6.5 - 10 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B0-U0-G0
Lifetime L90 (hour)	>72, 600
Lifetime L80 (hour)	>72, 600

Options

Control	On/Off, 0-10V
Product colors	
Height	3.3'

Extras


Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	8 lbs
Driver	Internal LED driver
Driver surge protection	4/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










6281002

6281002

Project name		Type		Quantity	
Date		Note			

LB6051.693-US-____-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[350] 6.5 W [700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 3.3'	Luminaire body options	Anchor bolts		
[HC]	[DPC] Double powder coating	[628I002] 628I002		

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6051.693-US-SYM-3L-350-740	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	285 lm	6.5 W	4000 K CRI 70	On/Off, 0-10V
LB6051.693-US-SYM-3L-350-827	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	230 lm	6.5 W	2700 K CRI 80	On/Off, 0-10V
LB6051.693-US-SYM-3L-350-830	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	234 lm	6.5 W	3000 K CRI 80	On/Off, 0-10V
LB6051.693-US-SYM-3L-350-840	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	259 lm	6.5 W	4000 K CRI 80	On/Off, 0-10V
LB6051.693-US-SYM-3L-700-740	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	500 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LB6051.693-US-SYM-3L-700-827	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	398 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LB6051.693-US-SYM-3L-700-830	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	403 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LB6051.693-US-SYM-3L-700-840	[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	452 lm	10 W	4000 K CRI 80	On/Off, 0-10V