


# NORMA L

LB6056.510-US

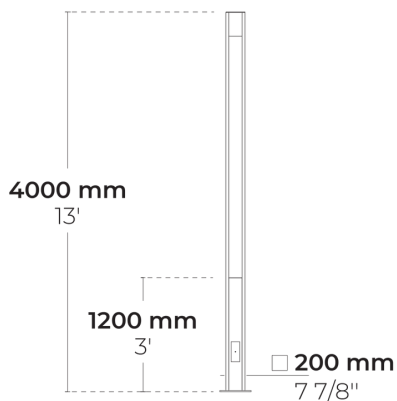

[SYM-4L]

Symmetric, Special  
effect: 4 lines - 120°

## Configurations

<b>Light distribution</b>	[SYM-4L] 120°
<b>Delivered lumens flux</b>	2231 - 3653 lm
<b>Rated input power</b>	36 - 56 W
<b>Color temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>BUG rating</b>	B1-U0-G1
<b>Lifetime L90 (hour)</b>	>72, 600
<b>Lifetime L80 (hour)</b>	>72, 600

## Options

<b>Control</b>	On/Off, 0-10V
<b>Product colors</b>	

## Extras


<b>Luminaire body options</b>	Double powder coating
-------------------------------	-----------------------

## Technical information

<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	73.8 lbs
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	6/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)


Anchor bolts                      Bolt covers



90CJ004

90CJ004

Bolt covers










C3F2C.T001

C3F2C.T001

Project name				Type		Quantity	
Date		Note					

**LB6056.510-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM-4L]</b> Symmetric, Special effect: 4 lines - 120°	<b>[700]</b> 36 W  <b>[1050]</b> 56 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[0-10V]</b> 0-10V	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Anchor bolts</b>			
	<b>[90CJ004]</b> 90CJ004			
	<b>Bolt covers</b>			
	<b>[C3F2C.T001]</b> C3F2C.T001			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6056.510-US-SYM-4L-1050-740	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	3653 lm	56 W	4000 K CRI 70	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-827	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2874 lm	56 W	2700 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-830	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2970 lm	56 W	3000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-840	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	3273 lm	56 W	4000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-740	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2800 lm	36 W	4000 K CRI 70	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-827	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2231 lm	36 W	2700 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-830	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2256 lm	36 W	3000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-840	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2531 lm	36 W	4000 K CRI 80	On/Off, 0-10V