



LIA

LB6059.599-EN

CE UK CA IK08 IP66 

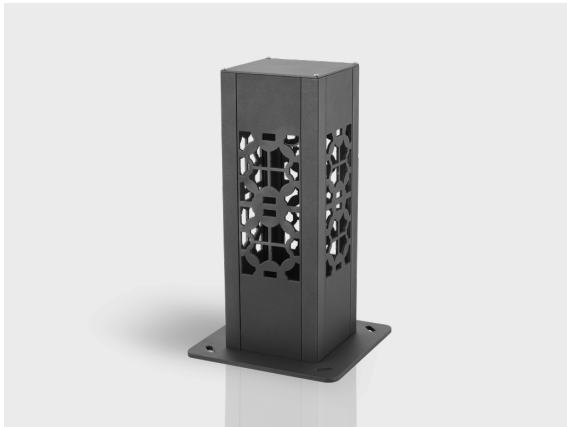


[SYM-4L]

Symmetric, Special effect: 4 lines - 50°

Variants

<b>Light distribution</b>	[SYM-4L] 50°
<b>Delivered lumens flux</b>	256 - 582 lm
<b>Rated input power</b>	14 - 29 W
<b>Colour temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>BUG rating</b>	B0-U0-G1, B0-U0-G0
<b>Lifetime L90B50 (hour)</b>	>55, 000
<b>Lifetime L80B50 (hour)</b>	>55, 000

Options

<b>Control</b>	On/Off
<b>Product colours</b>	
<b>Height</b>	50cm,

Extras

<b>Consult the factory</b>	Custom pattern
<b>Luminaire body options</b>	Double powder coating


Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	Glass lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	6.84 kg
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	4/2 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable

## Accessories (To be ordered separately)

---

### Anchorage










**6281003**

6281003

Project name		Type		Quantity	
Date		Note			

**LB6059.599-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[SYM-4L]</b> Symmetric, Special effect: 4 lines - 50°	<b>[350]</b> 14 W  <b>[500]</b> 21 W  <b>[700]</b> 29 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark grey  <b>[HM3]</b>  Anthracite grey  <b>[HM4]</b>  Light grey  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Height</b>	<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>		
<b>[H0.50]</b> 50cm  <b>[HC]</b>	<b>Consult the factory</b>	<b>Anchorage</b>		
	<b>[CP]</b> Custom pattern	<b>[628I003]</b> 628I003		
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6059.599-EN-SYM-4L-350-740	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	290 lm	14 W	4000 K CRI 70	On/Off
LB6059.599-EN-SYM-4L-350-827	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	256 lm	14 W	2700 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-350-830	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	267 lm	14 W	3000 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-350-840	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	274 lm	14 W	4000 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-500-740	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	415 lm	21 W	4000 K CRI 70	On/Off
LB6059.599-EN-SYM-4L-500-827	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	366 lm	21 W	2700 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-500-830	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	381 lm	21 W	3000 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-500-840	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	392 lm	21 W	4000 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-700-740	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	582 lm	29 W	4000 K CRI 70	On/Off
LB6059.599-EN-SYM-4L-700-827	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	513 lm	29 W	2700 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-700-830	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	535 lm	29 W	3000 K CRI 80	On/Off
LB6059.599-EN-SYM-4L-700-840	[SYM-4L] Symmetric, Special effect: 4 lines - 50°	550 lm	29 W	4000 K CRI 80	On/Off