



WOODY

LB6062.693-US



PHASED-
OUT

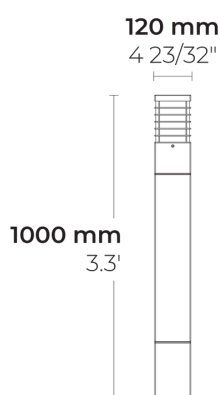

[SYM-4L]

Symmetric, Special
effect: 4 lines - 240°

Configurations

Light distribution	[SYM-4L] 240°
Delivered lumens flux	109 - 133 lm
Rated input power	10 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B0-U2-G1, B0-U2-G0
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options

Control	On/Off
Product colors	
Height	

Extras


Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminium head combined with special wood body
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.5 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










90AJ001

90AJ001

Project name				Type		Quantity	
Date		Note					

LB6062.693-US-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-4L] Symmetric, Special effect: 4 lines - 240°	[700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	<div> [HM1]  Black </div> <div> [HM2]  Dark gray </div> <div> [HM3]  Anthracite gray </div> <div> [HM4]  Light gray </div> <div> [HM5]  White </div> <div> [HM6]  Bronze </div> <div> [CC]  Custom color (Please specify RAL code) </div>
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[HC]	Luminaire body options	Anchor bolts		
	[DPC] Double powder coating	[90AJ001] 90AJ001		

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6062.693-US-SYM-4L-700-740	[SYM-4L] Symmetric, Special effect: 4 lines - 240°	133 lm	10 W	4000 K CRI 70	On/Off
LB6062.693-US-SYM-4L-700-827	[SYM-4L] Symmetric, Special effect: 4 lines - 240°	109 lm	10 W	2700 K CRI 80	On/Off
LB6062.693-US-SYM-4L-700-830	[SYM-4L] Symmetric, Special effect: 4 lines - 240°	124 lm	10 W	3000 K CRI 80	On/Off
LB6062.693-US-SYM-4L-700-840	[SYM-4L] Symmetric, Special effect: 4 lines - 240°	124 lm	10 W	4000 K CRI 80	On/Off