
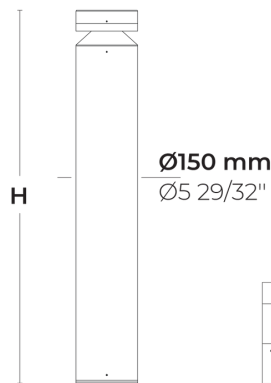


CORVUS 20 LED

LB6064.544-EN

CE UK CA IK08 IP65 

heper⁺



H
500 mm 19 44/64"
1000 mm 39 3/8"




[SYM]
Symmetric - 130

Variants

Light distribution	[SYM] 130
Delivered lumens flux	710 - 862 lm
Rated input power	20 W
Colour temperature	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70
Lifetime L90B50 (hour)	>102 000
Lifetime L80B50 (hour)	>102 000

Options

Control	On/Off, 0-10V, DALI, AutoDIM, StepDIM
Product colours	
Height	50cm, 1m,

Extras


Light output	Constant light output
Consult the factory	Class II, 120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	UV stable, bio-based polycarbonate diffusor
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	8.9kg(1m) , 7kg(0.5m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage










623J016

623J016

Project name		Type		Quantity	
Date		Note			

LB6064.544-EN-_____ -EN-C1-_____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 130	[350] 20 W	[822] 2200 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off [0-10V] 0-10V [DALI] DALI [AUTO] AutoDIM [STEP] StepDIM	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.50] 50cm [H1] 1m [HC]	Light output [CLO] Constant light output Consult the factory [C2] Class II [UNI] 120-277V 50/60Hz Luminaire body options [DPC] Double powder coating	Anchorage [623]016 623]016		

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6064.544-EN-SYM-350-740	[SYM] Symmetric - 130	862 lm	20 W	4000 K CRI 70	
LB6064.544-EN-SYM-350-822	[SYM] Symmetric - 130	710 lm	20 W	2200 K CRI 80	
LB6064.544-EN-SYM-350-827	[SYM] Symmetric - 130	811 lm	20 W	2700 K CRI 80	
LB6064.544-EN-SYM-350-830	[SYM] Symmetric - 130	811 lm	20 W	3000 K CRI 80	