


VERTEX 1 Module

LB6064.591-US

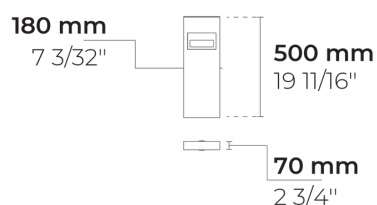

[SLFB]

Special linear,
Forward throw -
144x41°

Configurations

Light distribution	[SLFB] 144x41°
Delivered lumens flux	423 - 473 lm
Rated input power	8 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B2-U0-G1
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options


Control	On/Off
Product colors	
Height	1.6',

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	9.9 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










628I005

628I005

Project name				Type		Quantity	
Date		Note					

LB6064.591-US-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Height	Accessories (<i>To be ordered separately</i>)			
[H0.50] 1.6' [HC]	Anchor bolts			
	[628I005] 628I005			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6064.591-US-SLFB-350-740	[SLFB] Special linear, Forward throw - 144x41°	473 lm	8 W	4000 K CRI 70	On/Off
LB6064.591-US-SLFB-350-827	[SLFB] Special linear, Forward throw - 144x41°	423 lm	8 W	2700 K CRI 80	On/Off
LB6064.591-US-SLFB-350-830	[SLFB] Special linear, Forward throw - 144x41°	430 lm	8 W	3000 K CRI 80	On/Off
LB6064.591-US-SLFB-350-840	[SLFB] Special linear, Forward throw - 144x41°	450 lm	8 W	4000 K CRI 80	On/Off