


VERTEX 2 Module

LB6064.592-US

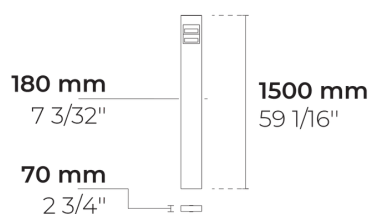

[SLFB]

Special linear,
Forward throw -
144x41°

Configurations

Light distribution	[SLFB] 144x41°
Delivered lumens flux	846 - 945 lm
Rated input power	15 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B2-U0-G1
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options


Control	On/Off, 0-10V
Product colors	

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	23.9 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20' of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










628I005

628I005

Project name				Type		Quantity	
Date		Note					

LB6064.592-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 144x41°	[350] 15 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	<div> [HM1]  Black </div> <div> [HM2]  Dark gray </div> <div> [HM3]  Anthracite gray </div> <div> [HM4]  Light gray </div> <div> [HM5]  White </div> <div> [HM6]  Bronze </div> <div> [CC]  Custom color (Please specify RAL code) </div>
Accessories (<i>To be ordered separately</i>)				
Anchor bolts				
[628I005] 628I005				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6064.592-US-SLFB-350-740	[SLFB] Special linear, Forward throw - 144x41°	945 lm	15 W	4000 K CRI 70	On/Off, 0-10V
LB6064.592-US-SLFB-350-827	[SLFB] Special linear, Forward throw - 144x41°	846 lm	15 W	2700 K CRI 80	On/Off, 0-10V
LB6064.592-US-SLFB-350-830	[SLFB] Special linear, Forward throw - 144x41°	860 lm	15 W	3000 K CRI 80	On/Off, 0-10V
LB6064.592-US-SLFB-350-840	[SLFB] Special linear, Forward throw - 144x41°	900 lm	15 W	4000 K CRI 80	On/Off, 0-10V