
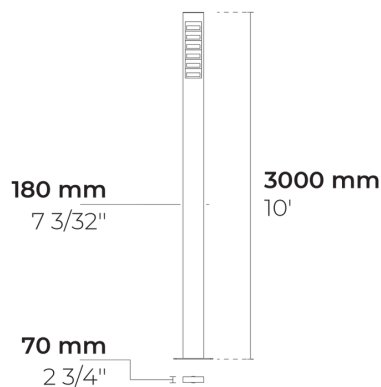


# VERTEX 6 Module

LB6064.596-EN

CE UK CA IK08 IP66 



**[SLFB]**  
Special linear,  
Forward throw -  
144x41°

## Variants

<b>Light distribution</b>	[SLFB] 144x41°
<b>Delivered lumens flux</b>	2538 - 2700 lm
<b>Rated input power</b>	45 W
<b>Colour temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 80
<b>BUG rating</b>	B0-U0-G0
<b>Lifetime L90B50 (hour)</b>	>60,000
<b>Lifetime L80B50 (hour)</b>	>60,000

## Options

<b>Control</b>	On/Off, DALI
<b>Product colours</b>	

## Extras

<b>Consult the factory</b>	120-277V 50/60Hz
<b>Luminaire body options</b>	Double powder coating


## Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	22.5 kg
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	6/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-25...50°C
<b>Cable</b>	0.5 m of flexible cable

## Accessories (To be ordered separately)

---

### Anchorage











**625J013**

625J013

Project name		Type		Quantity	
Date		Note			

**LB6064.596-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[SLFB]</b> Special linear, Forward throw - 144x41°	<b>[350]</b> 45 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[DALI]</b> DALI	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark grey  <b>[HM3]</b>  Anthracite grey  <b>[HM4]</b>  Light grey  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom colour (Please specify RAL code)  <b>[WD]</b>  Wooden
<b>Extras</b>	<b>Accessories (To be ordered separately)</b>			
<b>Consult the factory</b>	<b>Anchorage</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[625]013]</b> 625]013			
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6064.596-EN-SLFB-350-827	[SLFB] Special linear, Forward throw - 144x41°	2538 lm	45 W	2700 K CRI 80	On/Off, DALI
LB6064.596-EN-SLFB-350-830	[SLFB] Special linear, Forward throw - 144x41°	2579 lm	45 W	3000 K CRI 80	On/Off, DALI
LB6064.596-EN-SLFB-350-840	[SLFB] Special linear, Forward throw - 144x41°	2700 lm	45 W	4000 K CRI 80	On/Off, DALI