



VERTEX 6 Module

LB6064.596-US

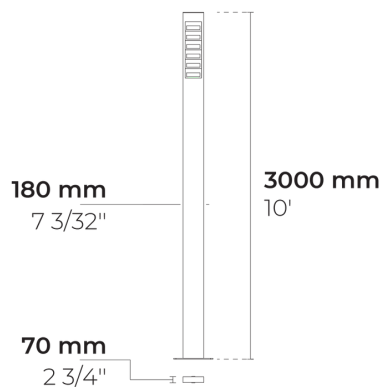

[SLFB]
Special linear,
Forward throw -
144x41°

Configurations

Light distribution	[SLFB] 144x41°
Delivered lumens flux	2538 - 2700 lm
Rated input power	45 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 80
BUG rating	B0-U0-G0
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

Options


Control	On/Off, 0-10V
Product colors	

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	49.6 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts










625J013

625J013

Project name		Type		Quantity	
Date		Note			

LB6064.596-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 144x41°	[350] 45 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Accessories (To be ordered separately)				
Anchor bolts				
[625]013 625]013				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6064.596-US-SLFB-350-827	[SLFB] Special linear, Forward throw - 144x41°	2538 lm	45 W	2700 K CRI 80	On/Off, 0-10V
LB6064.596-US-SLFB-350-830	[SLFB] Special linear, Forward throw - 144x41°	2579 lm	45 W	3000 K CRI 80	On/Off, 0-10V
LB6064.596-US-SLFB-350-840	[SLFB] Special linear, Forward throw - 144x41°	2700 lm	45 W	4000 K CRI 80	On/Off, 0-10V