


DRAGO Forward Duo

LB6068.570-EN

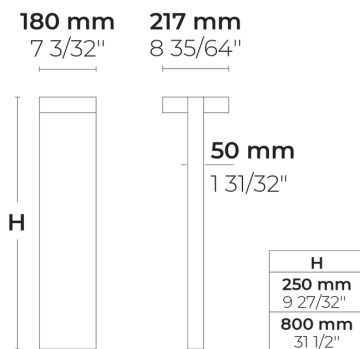

[SLFB]
Special linear,
Forward throw -
65x70°

Variants

Light distribution	[SLFB] 65x70°
Delivered lumens flux	1442 - 4200 lm
Rated input power	20 - 40 W
Colour temperature	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U0-G1, B0-U0-G0
Lifetime L90B50 (hour)	>42, 000
Lifetime L80B50 (hour)	>42, 000

Options

Control	On/Off
Product colours	
Height	25cm, 80cm,

Extras


Consult the factory	Emergency kit, Motion sensor
Luminaire body options	Double powder coating

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.11 kg (0.25 m), 5.67 kg (0.8 m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.

Accessories (To be ordered separately)

Anchorage










6281000

6281000

Project name		Type		Quantity	
Date		Note			

LB6068.570-EN-__-__-__-__-EN-C1-__-__-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 65x70°	[350] 20 W	[822] 2200 K CRI 80	[ONOFF] On/Off	[HM1]  Black
	[700] 40 W	[827] 2700 K CRI 80		[HM2]  Dark grey
		[830] 3000 K CRI 80		[HM3]  Anthracite grey
		[740] 4000 K CRI 70		[HM4]  Light grey
		[840] 4000 K CRI 80		[HM5]  White
			[HM6]  Bronze	
			[CC]  Custom colour (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.25] 25cm	Consult the factory	Anchorage		
[H0.80] 80cm	[EK] Emergency kit	[628I000] 628I000		
[HC]	[MS] Motion sensor			
	Luminaire body options			
	[DPC] Double powder coating			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LB6068.570-EN-SLFB-350-740	[SLFB] Special linear, Forward throw - 65x70°	2100 lm	20 W	4000 K CRI 70	On/Off
LB6068.570-EN-SLFB-350-822	[SLFB] Special linear, Forward throw - 65x70°	1442 lm	20 W	2200 K CRI 80	On/Off
LB6068.570-EN-SLFB-350-827	[SLFB] Special linear, Forward throw - 65x70°	1792 lm	20 W	2700 K CRI 80	On/Off
LB6068.570-EN-SLFB-350-830	[SLFB] Special linear, Forward throw - 65x70°	1848 lm	20 W	3000 K CRI 80	On/Off
LB6068.570-EN-SLFB-350-840	[SLFB] Special linear, Forward throw - 65x70°	1988 lm	20 W	4000 K CRI 80	On/Off
LB6068.570-EN-SLFB-700-740	[SLFB] Special linear, Forward throw - 65x70°	4200 lm	40 W	4000 K CRI 70	On/Off
LB6068.570-EN-SLFB-700-822	[SLFB] Special linear, Forward throw - 65x70°	2884 lm	40 W	2200 K CRI 80	On/Off
LB6068.570-EN-SLFB-700-827	[SLFB] Special linear, Forward throw - 65x70°	3584 lm	40 W	2700 K CRI 80	On/Off
LB6068.570-EN-SLFB-700-830	[SLFB] Special linear, Forward throw - 65x70°	3696 lm	40 W	3000 K CRI 80	On/Off
LB6068.570-EN-SLFB-700-840	[SLFB] Special linear, Forward throw - 65x70°	3976 lm	40 W	4000 K CRI 80	On/Off