


DRAGO Side Duo

LB6068.571-US

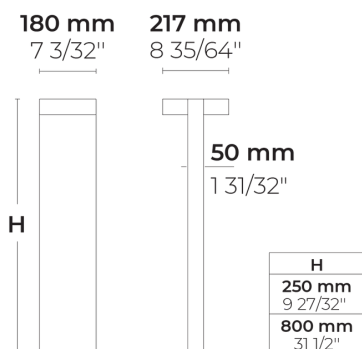

[SLSB]
Special linear, Side
throw - 145x45°

Configurations

| | |
|------------------------------|--|
| Light distribution | [SLSB] 145x45° |
| Delivered lumens flux | 720 - 2100 lm |
| Rated input power | 10 - 20 W |
| Color temperature | 2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80 |
| BUG rating | B0-U0-G0, B0-U0-G1 |
| Lifetime L90 (hour) | >42, 000 |
| Lifetime L80 (hour) | >42, 000 |

Options

| | |
|-----------------------|-----------------|
| Control | On/Off, 0-10V * |
| Product colors | |
| Height | 0.8', 2.6', |

Extras

| | |
|-------------------------------|------------------------------|
| Consult the factory | Emergency kit, Motion sensor |
| Luminaire body options | Double powder coating |


Technical information

| | |
|--------------------------------|---|
| Mounting | Surface mountable |
| Housing | Corrosion resistant, extruded, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 110-120V 50/60Hz |
| Insulation class | Class I |
| Weight | 15.4 lbs (2.6'), 13.2 lbs (0.8') |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 1/1 kV |
| Power factor | > 0.90 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Notes | 3000K CCT or warmer must be selected to be DarkSky International certified. |

* Please check the specific variant for each control type.

Accessories (To be ordered separately)

Anchor bolts










6281000

6281000

| | | | | | |
|--------------|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |

LB6068.571-US-____-____-____-____-____-____-____-____-____-____

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|--|---|---|--|
| [SLSB] Special linear, Side throw - 145x45° | [350] 10 W [700] 20 W | [822] 2200 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80 | [ONOFF] On/Off [0-10V] 0-10V | [HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code) |
| Height | Extras | Accessories (<i>To be ordered separately</i>) | | |
| [H0.25] 0.8' [H0.80] 2.6' [HC] | Consult the factory [EK] Emergency kit [MS] Motion sensor Luminaire body options [DPC] Double powder coating | Anchor bolts [628I000] 628I000 | | |

| Configuration code | Light distribution | Delivered lumens flux | Rated input power | Color temperature | Control |
|----------------------------|---|-----------------------|-------------------|-------------------|---------------|
| LB6068.571-US-SLSB-350-740 | [SLSB] Special linear, Side throw - 145x45° | 1050 lm | 10 W | 4000 K CRI 70 | On/Off |
| LB6068.571-US-SLSB-350-822 | [SLSB] Special linear, Side throw - 145x45° | 720 lm | 10 W | 2200 K CRI 80 | On/Off |
| LB6068.571-US-SLSB-350-827 | [SLSB] Special linear, Side throw - 145x45° | 896 lm | 10 W | 2700 K CRI 80 | On/Off |
| LB6068.571-US-SLSB-350-830 | [SLSB] Special linear, Side throw - 145x45° | 924 lm | 10 W | 3000 K CRI 80 | On/Off |
| LB6068.571-US-SLSB-350-840 | [SLSB] Special linear, Side throw - 145x45° | 994 lm | 10 W | 4000 K CRI 80 | On/Off |
| LB6068.571-US-SLSB-700-740 | [SLSB] Special linear, Side throw - 145x45° | 2100 lm | 20 W | 4000 K CRI 70 | On/Off, 0-10V |
| LB6068.571-US-SLSB-700-822 | [SLSB] Special linear, Side throw - 145x45° | 1442 lm | 20 W | 2200 K CRI 80 | On/Off, 0-10V |
| LB6068.571-US-SLSB-700-827 | [SLSB] Special linear, Side throw - 145x45° | 1792 lm | 20 W | 2700 K CRI 80 | On/Off, 0-10V |
| LB6068.571-US-SLSB-700-830 | [SLSB] Special linear, Side throw - 145x45° | 1848 lm | 20 W | 3000 K CRI 80 | On/Off, 0-10V |
| LB6068.571-US-SLSB-700-840 | [SLSB] Special linear, Side throw - 145x45° | 1988 lm | 20 W | 4000 K CRI 80 | On/Off, 0-10V |