


DRAGO Side Duo

LB6068.571-US

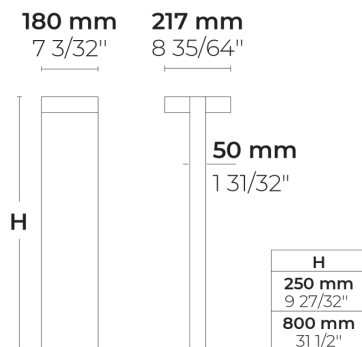


[SLSB]
Special linear, Side
throw - 145x45°

Configurations

Light distribution	[SLSB] 145x45°
Delivered lumens flux	720 - 2100 lm
Rated input power	10 - 20 W
Color temperature	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B0-U0-G0, B0-U0-G1
Lifetime L90 (hour)	>42, 000
Lifetime L80 (hour)	>42, 000

Options

Control	On/Off, 0-10V *
Product colors	
Height	0.8', 2.6',

Extras

Consult the factory	Emergency kit, Motion sensor
Luminaire body options	Double powder coating


Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	110-120V 50/60Hz
Insulation class	Class I
Weight	15.4 lbs (2.6'), 13.2 lbs (0.8')
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.

* Please check the specific variant for each control type.

Accessories (To be ordered separately)

Anchor bolts










628I000

628I000

Project name				Type		Quantity	
Date		Note					

LB6068.571-US-____-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLSB] Special linear, Side throw - 145x45°	[350] 10 W [700] 20 W	[822] 2200 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.25] 0.8' [H0.80] 2.6' [HC]	Consult the factory	Anchor bolts		
	[EK] Emergency kit	[628I000] 628I000		
	[MS] Motion sensor			
	Luminaire body options			
	[DPC] Double powder coating			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6068.571-US-SLSB-350-740	[SLSB] Special linear, Side throw - 145x45°	1050 lm	10 W	4000 K CRI 70	On/Off
LB6068.571-US-SLSB-350-822	[SLSB] Special linear, Side throw - 145x45°	720 lm	10 W	2200 K CRI 80	On/Off
LB6068.571-US-SLSB-350-827	[SLSB] Special linear, Side throw - 145x45°	896 lm	10 W	2700 K CRI 80	On/Off
LB6068.571-US-SLSB-350-830	[SLSB] Special linear, Side throw - 145x45°	924 lm	10 W	3000 K CRI 80	On/Off
LB6068.571-US-SLSB-350-840	[SLSB] Special linear, Side throw - 145x45°	994 lm	10 W	4000 K CRI 80	On/Off
LB6068.571-US-SLSB-700-740	[SLSB] Special linear, Side throw - 145x45°	2100 lm	20 W	4000 K CRI 70	On/Off, 0-10V
LB6068.571-US-SLSB-700-822	[SLSB] Special linear, Side throw - 145x45°	1442 lm	20 W	2200 K CRI 80	On/Off, 0-10V
LB6068.571-US-SLSB-700-827	[SLSB] Special linear, Side throw - 145x45°	1792 lm	20 W	2700 K CRI 80	On/Off, 0-10V
LB6068.571-US-SLSB-700-830	[SLSB] Special linear, Side throw - 145x45°	1848 lm	20 W	3000 K CRI 80	On/Off, 0-10V
LB6068.571-US-SLSB-700-840	[SLSB] Special linear, Side throw - 145x45°	1988 lm	20 W	4000 K CRI 80	On/Off, 0-10V