



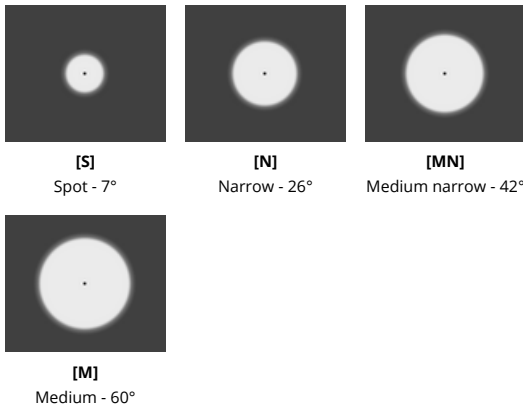

UPCOMING

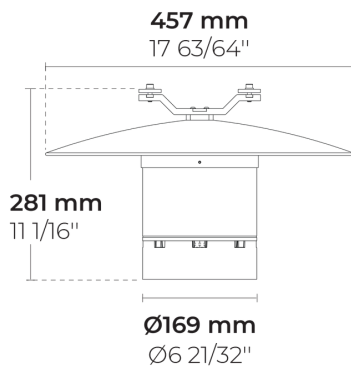

### Variants

<b>Light distribution</b>	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
<b>Delivered lumens flux</b>	1767 - 2787 lm
<b>Rated input power</b>	27 W
<b>Colour temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>Lifetime L90B50 (hour)</b>	>72, 600
<b>Lifetime L80B50 (hour)</b>	>72, 600

### Options

<b>Control</b>	On/Off, DALI
<b>Product colours</b>	

### Extras








<b>Consult the factory</b>	Class II, 120-277V 50/60Hz
<b>Luminaire body options</b>	Double powder coating

### Technical information

<b>Mounting</b>	Ceiling mountable
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone rubber
<b>Lens / Reflector</b>	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	4.5 kg
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.2 m of flexible cable

Project name		Type		Quantity	
Date		Note			

**LC8018.694-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[S]</b> Spot - 7°	<b>[700]</b> 27 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
<b>[N]</b> Narrow - 26°		<b>[830]</b> 3000 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b>  Dark grey
<b>[MN]</b> Medium narrow - 42°		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite grey
<b>[M]</b> Medium - 60°		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light grey
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom colour (Please specify RAL code)

**Extras**

**Consult the factory**

**[C2]**  
Class II

**[UNI]**  
120-277V 50/60Hz

**Luminaire body options**

**[DPC]**  
Double powder coating

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LC8018.694-EN-S-700-740	[S] Spot - 7°	2456 lm	27 W	4000 K CRI 70	On/Off, DALI
LC8018.694-EN-S-700-827	[S] Spot - 7°	2456 lm	27 W	2700 K CRI 80	On/Off, DALI
LC8018.694-EN-S-700-830	[S] Spot - 7°	2787 lm	27 W	3000 K CRI 80	On/Off, DALI
LC8018.694-EN-S-700-840	[S] Spot - 7°	2787 lm	27 W	4000 K CRI 80	On/Off, DALI
LC8018.694-EN-N-700-740	[N] Narrow - 26°	2456 lm	27 W	4000 K CRI 70	On/Off, DALI
LC8018.694-EN-N-700-827	[N] Narrow - 26°	2456 lm	27 W	2700 K CRI 80	On/Off, DALI
LC8018.694-EN-N-700-830	[N] Narrow - 26°	2787 lm	27 W	3000 K CRI 80	On/Off, DALI
LC8018.694-EN-N-700-840	[N] Narrow - 26°	2787 lm	27 W	4000 K CRI 80	On/Off, DALI
LC8018.694-EN-MN-700-740	[MN] Medium narrow - 42°	2402 lm	27 W	4000 K CRI 70	On/Off, DALI
LC8018.694-EN-MN-700-827	[MN] Medium narrow - 42°	1980 lm	27 W	2700 K CRI 80	On/Off, DALI
LC8018.694-EN-MN-700-830	[MN] Medium narrow - 42°	2001 lm	27 W	3000 K CRI 80	On/Off, DALI
LC8018.694-EN-MN-700-840	[MN] Medium narrow - 42°	2245 lm	27 W	4000 K CRI 80	On/Off, DALI
LC8018.694-EN-M-700-740	[M] Medium - 60°	2146 lm	27 W	4000 K CRI 70	On/Off, DALI
LC8018.694-EN-M-700-827	[M] Medium - 60°	1767 lm	27 W	2700 K CRI 80	On/Off, DALI
LC8018.694-EN-M-700-830	[M] Medium - 60°	1788 lm	27 W	3000 K CRI 80	On/Off, DALI
LC8018.694-EN-M-700-840	[M] Medium - 60°	2006 lm	27 W	4000 K CRI 80	On/Off, DALI