


OTTO

LD7039.002-US



PHASED-OUT

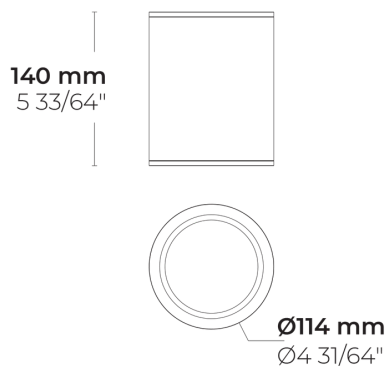

[N]
Narrow - NEMA Type
2 - 25°

Configurations

Light distribution	[N] 25°
Delivered lumens flux	955 - 1021 lm
Rated input power	18.5 W
Color temperature	3000 K CRI 90, 4000 K CRI 90
BUG rating	B1-U0-G0

Options

Control

On/Off, Phase dimming

Product colors










Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.21 ft²
Weight	1.6 lbs
Driver	Internal LED driver
Power factor	> 0.95
Through wiring	Single power cord entry
Power cord	8" of flexible power cord

Project name				Type		Quantity	
Date		Note					

LD7039.002-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 25°	[I] 18.5 W	[930] 3000 K CRI 90 [940] 4000 K CRI 90	[ONOFF] On/Off [PD] Phase dimming	<div> [HM1]  Black </div> <div> [HM2]  Dark gray </div> <div> [HM3]  Anthracite gray </div> <div> [HM4]  Light gray </div> <div> [HM5]  White </div> <div> [HM6]  Bronze </div> <div> [CC]  Custom color (Please specify RAL code) </div>

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LD7039.002-US-N-930	[N] Narrow - NEMA Type 2 - 25°	955 lm	18.5 W	3000 K CRI 90	
LD7039.002-US-N-940	[N] Narrow - NEMA Type 2 - 25°	1021 lm	18.5 W	4000 K CRI 90	