


ELIPSO

LF8008.504-US



PHASED-
OUT

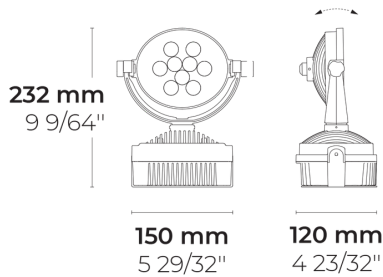

[M]
Medium - NEMA
Type 4 -

Configurations

Light distribution	[M]
Delivered lumens flux	500 - 600 lm
Rated input power	11 W
Color temperature	3000 K CRI 80, 4000 K CRI 70

Options








Control	On/Off
Product colors	

Technical information

Tilt angle	+15°/-15°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	6.94 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Power cord	16" of flexible power cord

Project name		Type		Quantity	
Date		Note			

LF8008.504-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[M] Medium - NEMA Type 4	[350] 11 W	[830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LF8008.504-US-M-350-740	[M] Medium - NEMA Type 4	600 lm	11 W	4000 K CRI 70	On/Off
LF8008.504-US-M-350-830	[M] Medium - NEMA Type 4	500 lm	11 W	3000 K CRI 80	On/Off