
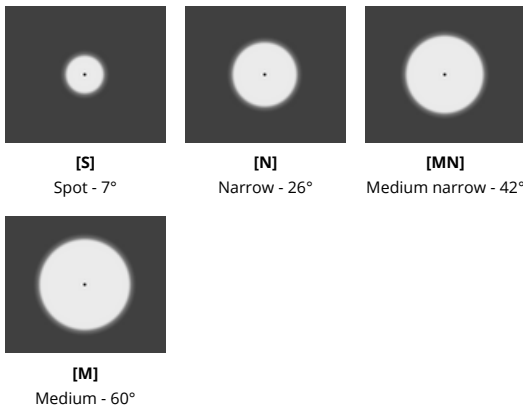


PUNTO S

LF8017.693-EN

CE UK CA IK08 IP65 

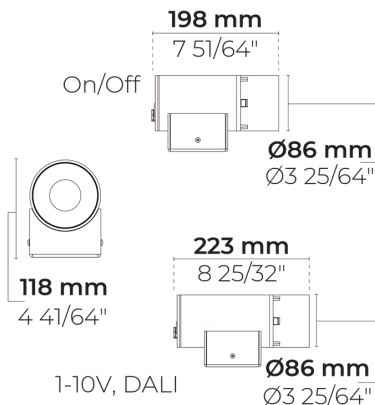

Variants

Light distribution	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
Delivered lumens flux	606 - 1019 lm
Rated input power	10 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U1-G0, B1-U0-G0
Lifetime L90B50 (hour)	>72, 600
Lifetime L80B50 (hour)	>72, 600

Options

Control	On/Off, DALI
Product colours	

Extras


Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Surface mountable via a bracket (standard) or spike (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.02 m ²
Weight	1.52 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.4 m of flexible cable

Accessories (To be ordered separately)

Mounting accessories



Spike

160405040








Optical accessories



Visor for PUNTO S

007502282

Project name		Type		Quantity	
Date		Note			
LF8017.693-EN-__-__-__-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7° [N] Narrow - 26° [MN] Medium narrow - 42° [M] Medium - 60°	[700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160405040] Spike			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502282] Visor for PUNTO S			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LF8017.693-EN-S-700-740	[S] Spot - 7°	1019 lm	10 W	4000 K CRI 70	On/Off, DALI
LF8017.693-EN-S-700-827	[S] Spot - 7°	837 lm	10 W	2700 K CRI 80	On/Off, DALI
LF8017.693-EN-S-700-830	[S] Spot - 7°	849 lm	10 W	3000 K CRI 80	On/Off, DALI
LF8017.693-EN-S-700-840	[S] Spot - 7°	953 lm	10 W	4000 K CRI 80	On/Off, DALI
LF8017.693-EN-N-700-740	[N] Narrow - 26°	1019 lm	10 W	4000 K CRI 70	On/Off, DALI
LF8017.693-EN-N-700-827	[N] Narrow - 26°	837 lm	10 W	2700 K CRI 80	On/Off, DALI
LF8017.693-EN-N-700-830	[N] Narrow - 26°	849 lm	10 W	3000 K CRI 80	On/Off, DALI
LF8017.693-EN-N-700-840	[N] Narrow - 26°	953 lm	10 W	4000 K CRI 80	On/Off, DALI
LF8017.693-EN-MN-700-740	[MN] Medium narrow - 42°	738 lm	10 W	4000 K CRI 70	On/Off, DALI
LF8017.693-EN-MN-700-827	[MN] Medium narrow - 42°	686 lm	10 W	2700 K CRI 80	On/Off, DALI
LF8017.693-EN-MN-700-830	[MN] Medium narrow - 42°	697 lm	10 W	3000 K CRI 80	On/Off, DALI
LF8017.693-EN-MN-700-840	[MN] Medium narrow - 42°	782 lm	10 W	4000 K CRI 80	On/Off, DALI
LF8017.693-EN-M-700-740	[M] Medium - 60°	738 lm	10 W	4000 K CRI 70	On/Off, DALI
LF8017.693-EN-M-700-827	[M] Medium - 60°	606 lm	10 W	2700 K CRI 80	On/Off, DALI
LF8017.693-EN-M-700-830	[M] Medium - 60°	615 lm	10 W	3000 K CRI 80	On/Off, DALI
LF8017.693-EN-M-700-840	[M] Medium - 60°	690 lm	10 W	4000 K CRI 80	On/Off, DALI