
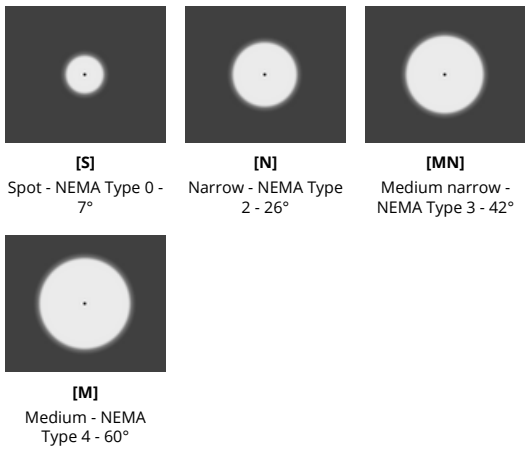


PUNTO

LF8018.694-US

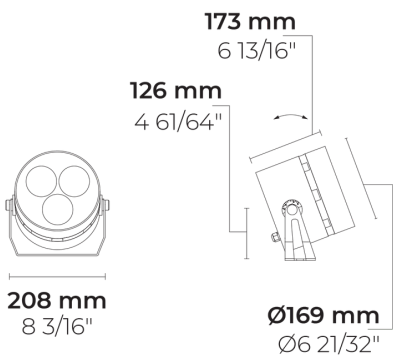

Configurations

Light distribution	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
Delivered lumens flux	1767 - 2981 lm
Rated input power	27 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>72, 600
Lifetime L80 (hour)	>72, 600

Options

Control	On/Off, 0-10V
Product colors	

Extras

Luminaire body options	Double powder coating
-------------------------------	-----------------------


Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.32 ft²
Weight	9.1 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)


Mounting accessories

Optical accessories



Spike

160405040










Snoot for PUNTO

007502216

Project name		Type		Quantity	
Date		Note			

LF8018.694-US- _ _ _ _ _

Light distribution	Rated input power	Color temperature	Control	Product colors
<p>[S] Spot - NEMA Type 0 - 7°</p> <p>[N] Narrow - NEMA Type 2 - 26°</p> <p>[MN] Medium narrow - NEMA Type 3 - 42°</p> <p>[M] Medium - NEMA Type 4 - 60°</p>	<p>[700] 27 W</p>	<p>[827] 2700 K CRI 80</p> <p>[830] 3000 K CRI 80</p> <p>[740] 4000 K CRI 70</p> <p>[840] 4000 K CRI 80</p>	<p>[ONOFF] On/Off</p> <p>[0-10V] 0-10V</p>	<p>[HM1]  Black</p> <p>[HM2]  Dark gray</p> <p>[HM3]  Anthracite gray</p> <p>[HM4]  Light gray</p> <p>[HM5]  White</p> <p>[HM6]  Bronze</p> <p>[CC]  Custom color (Please specify RAL code)</p>
Extras	Accessories (To be ordered separately)			
Luminaire body options	Mounting accessories			
[DPC] Double powder coating	[160405040] Spike			
	Optical accessories			
	[007502216] Snoot for PUNTO			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LF8018.694-US-S-700-740	[S] Spot - NEMA Type 0 - 7°	2981 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LF8018.694-US-S-700-827	[S] Spot - NEMA Type 0 - 7°	2456 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LF8018.694-US-S-700-830	[S] Spot - NEMA Type 0 - 7°	2484 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LF8018.694-US-S-700-840	[S] Spot - NEMA Type 0 - 7°	2787 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LF8018.694-US-N-700-740	[N] Narrow - NEMA Type 2 - 26°	2981 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LF8018.694-US-N-700-827	[N] Narrow - NEMA Type 2 - 26°	2456 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LF8018.694-US-N-700-830	[N] Narrow - NEMA Type 2 - 26°	2484 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LF8018.694-US-N-700-840	[N] Narrow - NEMA Type 2 - 26°	2787 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LF8018.694-US-MN-700-740	[MN] Medium narrow - NEMA Type 3 - 42°	2402 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LF8018.694-US-MN-700-827	[MN] Medium narrow - NEMA Type 3 - 42°	1980 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LF8018.694-US-MN-700-830	[MN] Medium narrow - NEMA Type 3 - 42°	2001 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LF8018.694-US-MN-700-840	[MN] Medium narrow - NEMA Type 3 - 42°	2245 lm	27 W	4000 K CRI 80	On/Off, 0-10V
LF8018.694-US-M-700-740	[M] Medium - NEMA Type 4 - 60°	2146 lm	27 W	4000 K CRI 70	On/Off, 0-10V
LF8018.694-US-M-700-827	[M] Medium - NEMA Type 4 - 60°	1767 lm	27 W	2700 K CRI 80	On/Off, 0-10V
LF8018.694-US-M-700-830	[M] Medium - NEMA Type 4 - 60°	1788 lm	27 W	3000 K CRI 80	On/Off, 0-10V
LF8018.694-US-M-700-840	[M] Medium - NEMA Type 4 - 60°	2006 lm	27 W	4000 K CRI 80	On/Off, 0-10V