
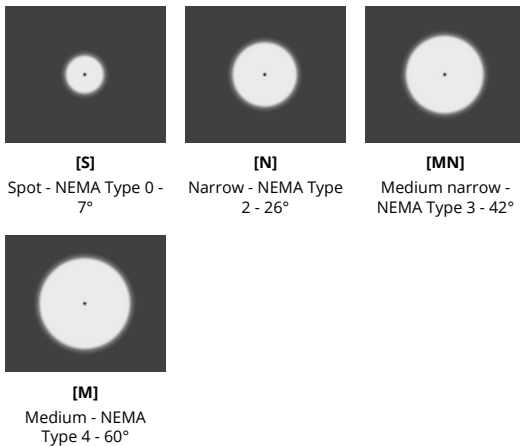


PUNTO S Ex

LF8030.693-US

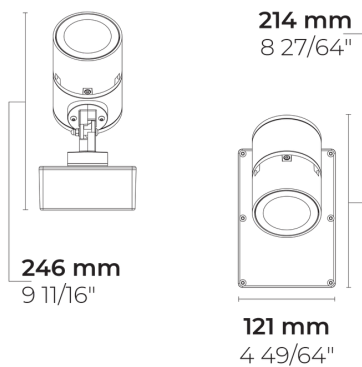

Configurations

Light distribution	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
Delivered lumens flux	606 - 1019 lm
Rated input power	10 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>72, 600
Lifetime L80 (hour)	>72, 600

Options

Control	On/Off, 0-10V
Product colors	

Extras

Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Mounting	Pedestal knuckle mount
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Optical accessories










Visor for PUNTO S

007502282

Project name		Type		Quantity	
Date		Note			

LF8030.693-US-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
<p>[S] Spot - NEMA Type 0 - 7°</p> <p>[N] Narrow - NEMA Type 2 - 26°</p> <p>[MN] Medium narrow - NEMA Type 3 - 42°</p> <p>[M] Medium - NEMA Type 4 - 60°</p>	<p>[700] 10 W</p>	<p>[827] 2700 K CRI 80</p> <p>[830] 3000 K CRI 80</p> <p>[740] 4000 K CRI 70</p> <p>[840] 4000 K CRI 80</p>	<p>[ONOFF] On/Off</p> <p>[0-10V] 0-10V</p>	<p>[HM1]  Black</p> <p>[HM2]  Dark gray</p> <p>[HM3]  Anthracite gray</p> <p>[HM4]  Light gray</p> <p>[HM5]  White</p> <p>[HM6]  Bronze</p> <p>[CC]  Custom color (Please specify RAL code)</p>
Extras	Accessories (To be ordered separately)			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502282] Visor for PUNTO S			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LF8030.693-US-S-700-740	[S] Spot - NEMA Type 0 - 7°	1019 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LF8030.693-US-S-700-827	[S] Spot - NEMA Type 0 - 7°	837 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LF8030.693-US-S-700-830	[S] Spot - NEMA Type 0 - 7°	849 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LF8030.693-US-S-700-840	[S] Spot - NEMA Type 0 - 7°	953 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LF8030.693-US-N-700-740	[N] Narrow - NEMA Type 2 - 26°	1019 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LF8030.693-US-N-700-827	[N] Narrow - NEMA Type 2 - 26°	837 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LF8030.693-US-N-700-830	[N] Narrow - NEMA Type 2 - 26°	849 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LF8030.693-US-N-700-840	[N] Narrow - NEMA Type 2 - 26°	953 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LF8030.693-US-MN-700-740	[MN] Medium narrow - NEMA Type 3 - 42°	738 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LF8030.693-US-MN-700-827	[MN] Medium narrow - NEMA Type 3 - 42°	686 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LF8030.693-US-MN-700-830	[MN] Medium narrow - NEMA Type 3 - 42°	697 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LF8030.693-US-MN-700-840	[MN] Medium narrow - NEMA Type 3 - 42°	782 lm	10 W	4000 K CRI 80	On/Off, 0-10V
LF8030.693-US-M-700-740	[M] Medium - NEMA Type 4 - 60°	738 lm	10 W	4000 K CRI 70	On/Off, 0-10V
LF8030.693-US-M-700-827	[M] Medium - NEMA Type 4 - 60°	606 lm	10 W	2700 K CRI 80	On/Off, 0-10V
LF8030.693-US-M-700-830	[M] Medium - NEMA Type 4 - 60°	615 lm	10 W	3000 K CRI 80	On/Off, 0-10V
LF8030.693-US-M-700-840	[M] Medium - NEMA Type 4 - 60°	690 lm	10 W	4000 K CRI 80	On/Off, 0-10V