


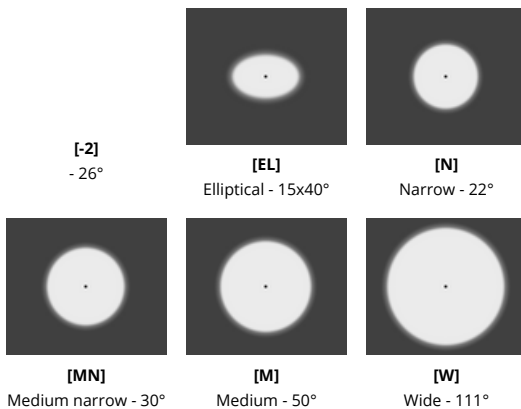
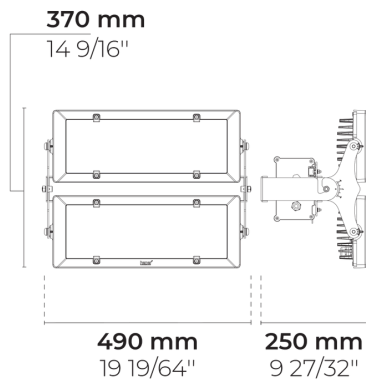
REGIO IN 2 Module

LF8037.522-EN

CE UK CA IK08 IP66 




PHASED-OUT



Variants

Light distribution	[-2] 26°, [EL] 15x40°, [N] 22°, [MN] 30°, [M] 50°, [W] 111°
Delivered lumens flux	46744 - 55652 lm
Rated input power	459 - 460 W
Colour temperature	3000 K CRI 80, 4000 K CRI 80
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Control	On/Off, DALI
Product colours	  

Extras

Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Direct tray mountable
Tilt angle	+30°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	16.64 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/10 kV
Power factor	> 0.99
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of flexible cable




HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			

LF8037.522-EN-__-__-__-__-EN-C1-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[-2] - 26° [EL] Elliptical - 15x40° [N] Narrow - 22° [MN] Medium narrow - 30° [M] Medium - 50° [W] Wide - 111°	[700] 459 W [700] 460 W	[830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM3]  Anthracite grey [HM4]  Light grey [CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LF8037.522-EN-N-700-830	[N] Narrow - 22°	55652 lm	460 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-N-700-840	[N] Narrow - 22°	55652 lm	460 W	4000 K CRI 80	On/Off, DALI
LF8037.522-EN-MN-700-830	[MN] Medium narrow - 30°	51151 lm	459 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-MN-700-840	[MN] Medium narrow - 30°	51151 lm	459 W	4000 K CRI 80	On/Off, DALI
LF8037.522-EN-M-700-830	[M] Medium - 50°	46744 lm	459 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-M-700-840	[M] Medium - 50°	46744 lm	459 W	4000 K CRI 80	On/Off, DALI
LF8037.522-EN-W-700-830	[W] Wide - 111°	50550 lm	460 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-W-700-840	[W] Wide - 111°	50550 lm	460 W	4000 K CRI 80	On/Off, DALI
LF8037.522-EN-EL-700-830	[EL] Elliptical - 15x40°	48108 lm	460 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-EL-700-840	[EL] Elliptical - 15x40°	48108 lm	460 W	4000 K CRI 80	On/Off, DALI
LF8037.522-EN-N2-700-830	[] - 26°	53767 lm	460 W	3000 K CRI 80	On/Off, DALI
LF8037.522-EN-N2-700-840	[] - 26°	53767 lm	460 W	4000 K CRI 80	On/Off, DALI