

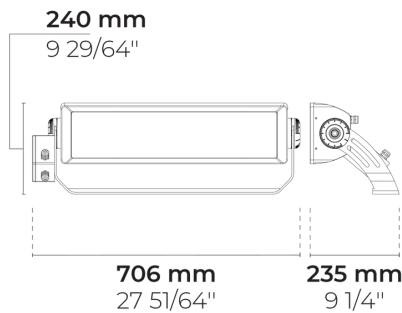


# REGIO V2 R HP 1 Module

LF8038.561-EN

CE UK CA IK08 IP66 

**heper**<sup>+</sup>



[EL]  
Elliptical - 20x30°

[EL-2]  
Elliptical - 35x85°

## Variants

<b>Light distribution</b>	[EL] 20x30°, [EL-2] 35x85°
<b>Delivered lumens flux</b>	42602 - 182234 lm
<b>Rated input power</b>	380 - 1480 W
<b>Colour temperature</b>	2700 K CRI 80, 3000 K CRI 80
<b>Lifetime L90B50 (hour)</b>	>52, 000
<b>Lifetime L80B50 (hour)</b>	>52, 000

## Options

### Product colours



## Extras

### Consult the factory

120-277V 50/60Hz


## Technical information

<b>Mounting</b>	Surface mountable via a bracket
<b>Tilt angle</b>	+110°/-180°
<b>Rotation angle</b>	±4°
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Glass / Diffuser</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	12.1 kg
<b>Driver</b>	External LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.99
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	1 m of flexible cable

## Accessories (To be ordered separately)

---

### Optical accessories






### Visor for REGIO V2 1 Module

100139030

Project name		Type		Quantity	
Date		Note			

**LF8038.561-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_**

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[EL]</b> Elliptical - 20x30°	<b>[2100]</b> 380 W	<b>[827]</b> 2700 K CRI 80		<b>[HM3]</b>  Anthracite grey
<b>[EL-2]</b> Elliptical - 35x85°	<b>[4280]</b> 580 W	<b>[830]</b> 3000 K CRI 80		<b>[HM4]</b>  Light grey
	<b>[2910]</b> 1180 W			<b>[CC]</b>  Custom colour (Please specify RAL code)
	<b>[1090]</b> 1480 W			
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Consult the factory</b>	<b>Optical accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100139030]</b> Visor for REGIO V2 1 Module			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LF8038.561-EN-SLFB-3330-740	[EL] Elliptical - 20x30°	140718 lm	1180 W	2700 K CRI 80	DALI
LF8038.561-EN-SLFB-3330-827	[EL] Elliptical - 20x30°	42602 lm	380 W	2700 K CRI 80	DALI
LF8038.561-EN-SLFB-3330-840	[EL] Elliptical - 20x30°	46163 lm	380 W	3000 K CRI 80	DALI
LF8038.561-EN-SLFB-3330-830	[EL-2] Elliptical - 35x85°	71082 lm	580 W	2700 K CRI 80	DALI
LF8038.561-EN-SLFB-3330-957	[EL-2] Elliptical - 35x85°	182234 lm	1480 W	2700 K CRI 80	DALI