


L&C LUMINAIRE 3 Module

LL2016.663-US



PHASED-OUT

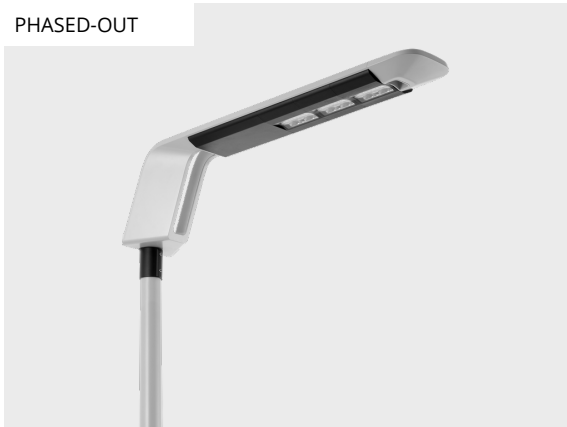

[T2]
Type II - 130x85°

Configurations

Light distribution	[T2] 130x85°
Delivered lumens flux	8837 - 10691 lm
Rated input power	101 W
Color temperature	3000 K CRI 70, 3000 K CRI 80, 4000 K CRI 70
BUG rating	B2-U0-G1, B2-U0-G2
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options

Control	On/Off, 0-10V
Product colors	

Extras




External surge protection	10 kV
Luminaire body options	Double powder coating

Technical information

Mounting	Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4"
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	1.21 ft²
Weight	18.5 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Project name		Type		Quantity	
Date		Note			

LL2016.663-US- _ _ _ _ _

Light distribution	Rated input power	Color temperature	Control	Product colors
[T2] Type II - 130x85°	[700] 101 W	[730] 3000 K CRI 70 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off [0-10V] 0-10V	[HM3]  Anthracite gray [HM4]  Light gray [CC]  Custom color (Please specify RAL code)

Extras
External surge protection
[SP10] 10 kV
Luminaire body options
[DPC] Double powder coating

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LL2016.663-US-T2-700-730	[T2] Type II - 130x85°	10691 lm	101 W	3000 K CRI 70	On/Off, 0-10V
LL2016.663-US-T2-700-740	[T2] Type II - 130x85°	10346 lm	101 W	4000 K CRI 70	On/Off, 0-10V
LL2016.663-US-T2-700-830	[T2] Type II - 130x85°	8837 lm	101 W	3000 K CRI 80	On/Off, 0-10V