



D-LIGHT 4 Module

LL2023.674-US

IK08 IP66 

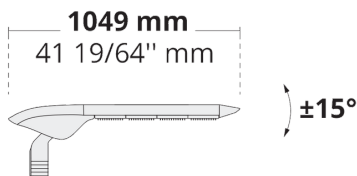

[T2-S]
Type II, Short

Configurations

Light distribution	[T2-S] 130° x 85°
Nominal LED lumens flux	18240 - 19600 lm
Nominal LED power	128 W (700 mA)
Rated luminaire lumens flux	15104 - 15900 lm
Rated luminaire power	135 W
Color temperature	4000 K CRI 70, 3000 K CRI 80
BUG rating	B3-U0-G2
Lifetime L90	>72, 600 hours
Lifetime L80	>72, 600 hours

Options

Control	On/Off, 1-10V, DALI, DynaDIM
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Product colors	

Extras

External surge protection	10 kV
Connectivity	NEMA 7-Pin Receptacle
Finishing options	Marine grade coating
Light output	Constant light output

Technical information

Mounting	Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4"
Tilt angle	-15°/+15°
Housing	Corrosion resistant die-cast aluminum housing
Finishing	Electrostatic powder coating
Fasteners	Stainless steel (grade 304)
Gasket	EPDM gasket (Shore A 20-25)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Wind catching area (EPA)	2.4 ft²
Weight	25.8 lb
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Thermally-separated internal LED driver
Driver surge protection	6/4 kV
Power factor	> 0.98
Through wiring	Single cable entry
Cable	19 11/16" of flexible cable
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

