



# PRIFMA 1 Module

LL2042.681-US

IK08 IP66 

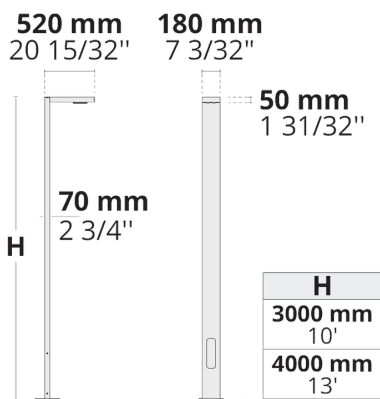

[T2-S]

Asymmetric,  
Side throw,  
Short

## Variants

|                             |                              |
|-----------------------------|------------------------------|
| Light distribution          | [T2-S] 130° x 85°            |
| Nominal LED lumens flux     | 4560 - 4900 lm               |
| Nominal LED power           | 32 W (700 mA)                |
| Rated luminaire lumens flux | 3776 - 4060 lm               |
| Rated luminaire power       | 35 W                         |
| Colour temperature          | 4000 K CRI 70, 3000 K CRI 80 |
| BUG rating                  | B1-U0-G1                     |
| Lifetime L90B50             | >72, 600 hours               |
| Lifetime L80B50             | >72, 600 hours               |

## Options

|                  |   |
|------------------|---|
| Control          | On/Off, 1-10V   |
| Input voltage    | 120-277V 50/60Hz  |
| Insulation class | Class I   |
| Product colours  |  |
| Height           | 3 m, 4 m  |

## Extras

|                   |                       |
|-------------------|-----------------------|
| Finishing options | Double coating        |
| Light output      | Constant light output |

## Technical information

|                         |   |
|-------------------------|---|
| Housing                 | Corrosion resistant aluminum housing  |
| Finishing               | Electrostatic powder coating  |
| Fasteners               | Stainless steel (grade 304)   |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector  |
| Glass / Diffusor        | Bio-based, enriched with bisphenol A diffusor   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Weight                  | 51.2 lb, 64.2 lb  |
| LED module              | Multi-chip high power LEDs on metal-core PCB  |
| Driver                  | Internal LED driver   |
| Driver surge protection | 6/6 kV  |
| Power factor            | > 0.95  |
| Through wiring          | Single cable entry  |
| Pole detail             | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

