


# PRIFMA ML EVO 2 Module Duo

LL2044.682-US

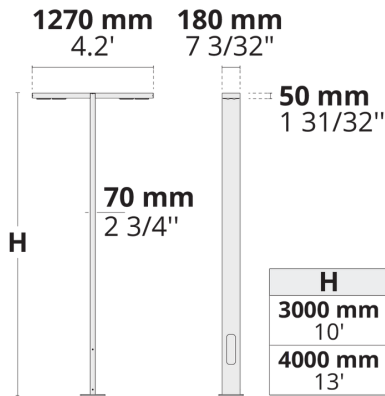

[T2]  
Type II - 130x85°

## Configurations

Light distribution	[T2] 130x85°
Delivered lumens flux	11643 - 14714 lm
Rated input power	136 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B2-U0-G1, B1-U0-G1
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

## Options

Control	On/Off, 0-10V
Product colors	
Height	10', 13.1', 16.4', 19.7',

## Extras

Luminaire body options	Double powder coating
------------------------	-----------------------

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	62.3 lbs (10'), 74.38 lbs (13'), 86.46 lbs (16.5'), 98.53 lbs (20')
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

# Poles (Included)

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFD.R03.T001-H3	10'	7.1x2.8"	
PAFD.R03.T001-H4	13.1'	7.1x2.8"	



Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LL2044.682-US-T2-700-740	[T2] Type II - 130x85°	13795 lm	136 W	4000 K CRI 70	On/Off, 0-10V
LL2044.682-US-T2-700-827	[T2] Type II - 130x85°	11643 lm	136 W	2700 K CRI 80	On/Off, 0-10V
LL2044.682-US-T2-700-830	[T2] Type II - 130x85°	14714 lm	136 W	4000 K CRI 80	On/Off, 0-10V
LL2044.682-US-T2-700-840	[T2] Type II - 130x85°	11783 lm	136 W	3000 K CRI 80	On/Off, 0-10V