

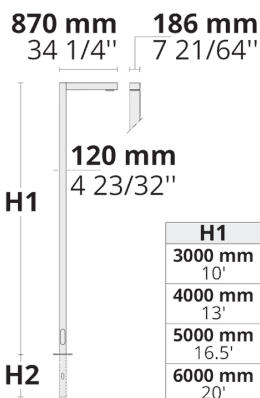


DOMINO 1 Module

LP4034.681-EN

CE IK08 IP66 



[T2-S]

Asymmetric,
Side throw,
Short

Variants

Light distribution	[T2-S] 130° x 85°
Nominal LED lumens flux	4460 - 4800 lm
Nominal LED power	32 W (700 mA)
Rated luminaire lumens flux	3697 - 4205 lm
Rated luminaire power	35 W
Colour temperature	4000 K CRI 70, 3000 K CRI 80
BUG rating	B1-U0-G1
Lifetime L90B50	>60, 000 hours
Lifetime L80B50	>60, 000 hours

Options

Control	On/Off, 1-10V, AstroDIM
Input voltage	220-240V 50/60Hz, 120-277V 50/60Hz
Insulation class	Class I
Product colours	
Height	3 m, 4 m, 5 m, 6 m

Extras

Finishing options	Double coating
Light output	Constant light output

Technical information

Housing	Corrosion resistant aluminum housing
Finishing	Electrostatic powder coating
Fasteners	Stainless steel (grade 304)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Weight	61 kg (5m), 77.5 kg (6m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

